

Product Data Sheet


ATS1810

ATS 4-way relay card

Product Overview

A 4-way relay card provides four single pole relays with connection terminals to the common (C), normally open (NO), and normally closed (NC) contacts. The relay contacts are rated at 1 Amp @ 0 to 30 VDC; reducing to 300 mA @ 48 VDC. If fitted to a DGP, two relay modules can be connected together in daisy-chain fashion to provide up to eight relays on ATS1201. When fitted to the ATS control panel or 4-door/4-lift DGP, only one relay module is allowed providing four relays.

An LED is provided for every relay to indicate activation.

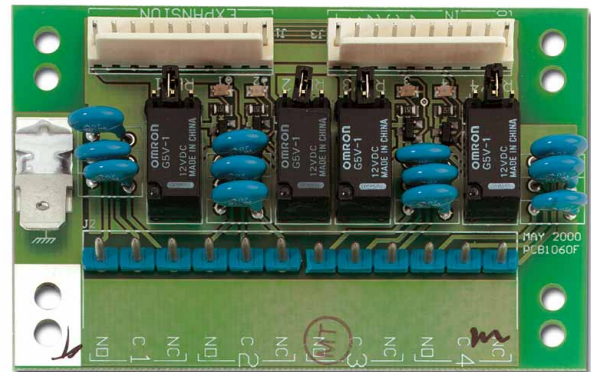

Standard Features

ATS1810

ATS 4-way relay card

Specifications

Supply voltage	10.5 - 13.8 VDC
Operating current	100 mA max.
Dimesions (W x H)	80 mm x 52 mm
Operating temperature	0° to +50°C
Humidity	95% non condensing

Ordering Information

Part No.	Description
ATS1810	ATS 4-way relay card
ATS1811	ATS 8-way clocked relay card
ATS1820	ATS 16-way clocked open collector card
ATS1821	ATS 8-way clocked open collector card, dialler interface