


Dual Mains Supply

- 3 Phase 230V (Delta 3/PE 230V) supply switched by external contactor (K1)
- Single Phase (1/N/PE 230V) 24 hour permanent

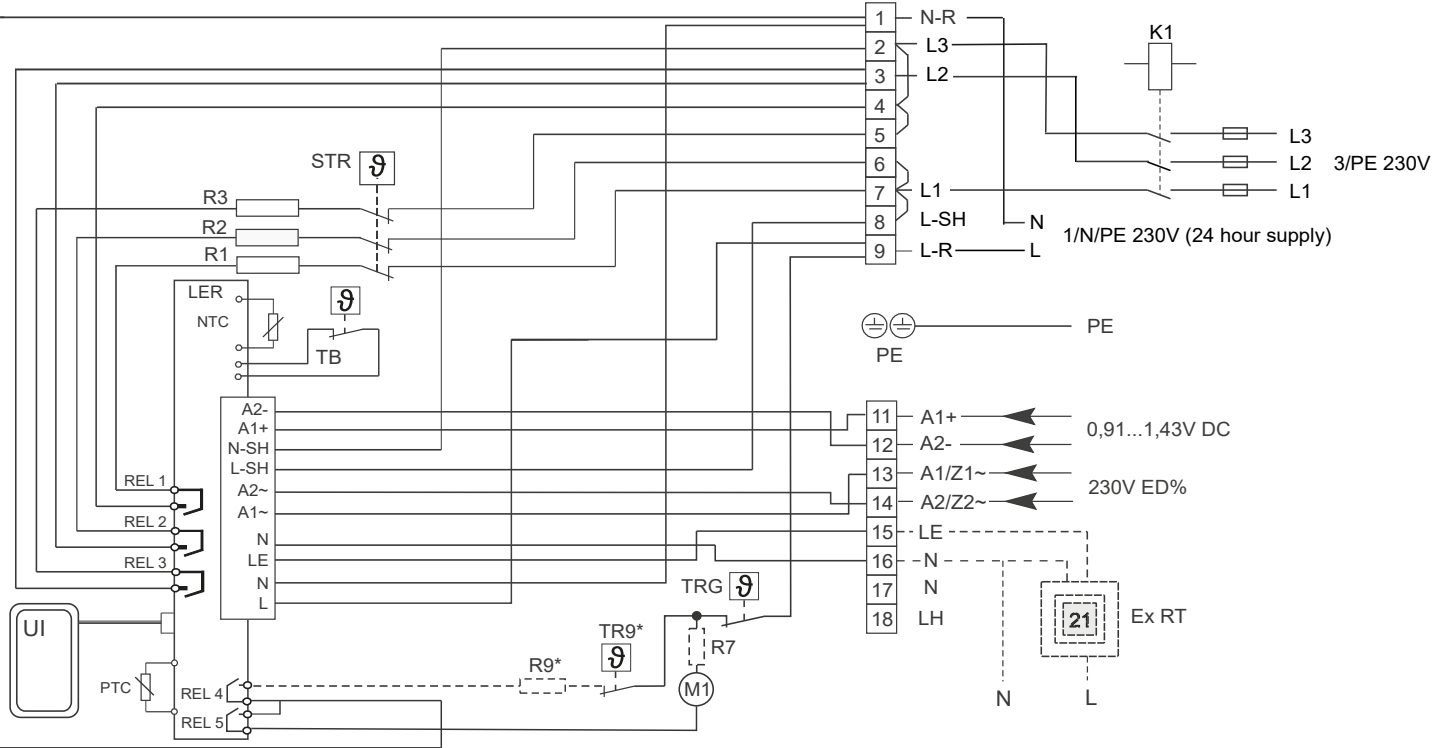

Single Mains Supply

- 3 Phase 230V (Delta 3/PE 230V) 24 hour permanent

