


## Geïsoleerde vrouwelijke vlakstekkers

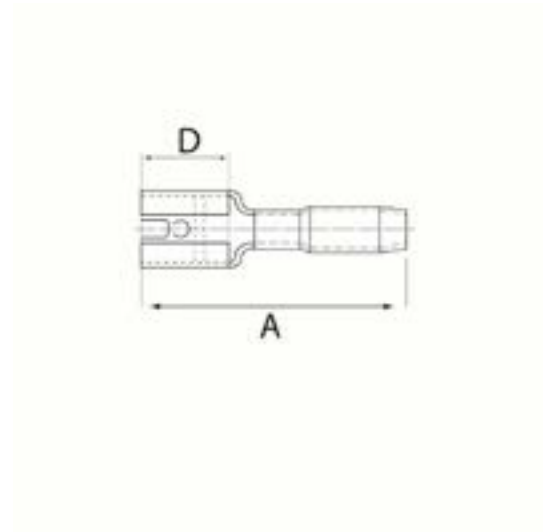

Voor fijn- en zeer fijnaderige geleiders, bijv. volgens EN 60228 kl. 5 en 6

MAT.: CuZn (Koper) VERTIND: Ja

Art. nr.	MM <sup>2</sup> KABEL	AFM. A	AFM. D	BRDTE STEKKER	DIKTE STEKKER	KLEUR	ISOLATIEMATERIAAL
820/1V	0.5 - 1	19	5.5	2.8	0.5	Rood	PA
820/1AV	0.5 - 1	19	5.5	2.8	0.8	Rood	PA
820/2V	0.5 - 1	20	7	4.8	0.5	Rood	PVC
820/3V	0.5 - 1	20	7	4.8	0.8	Rood	PVC
720V	0.5 - 1	21	7.5	6.3	0.8	Rood	PVC
830/1V	1.5 - 2.5	20	8	2.8	0.5	Blauw	PVC
830/1AV	1.5 - 2.5	20	8	2.8	0.8	Blauw	PVC
830/2V	1.5 - 2.5	20.5	7	4.8	0.5	Blauw	PVC
830/3V	1.5 - 2.5	20.5	7	4.8	0.8	Blauw	PVC
730V	1.5 - 2.5	21	7.5	6.3	0.8	Blauw	PVC
850/2V	4 - 6	20.5	9.5	4.8	0.5	Geel	PVC
850/3V	4 - 6	20.5	9.5	4.8	0.8	Geel	PVC
750V	4 - 6	25.5	11.5	6.3	0.8	Geel	PVC