


Dupline®/Optical Fibre Converters

Types G 3492 0000 and G 3493 0000

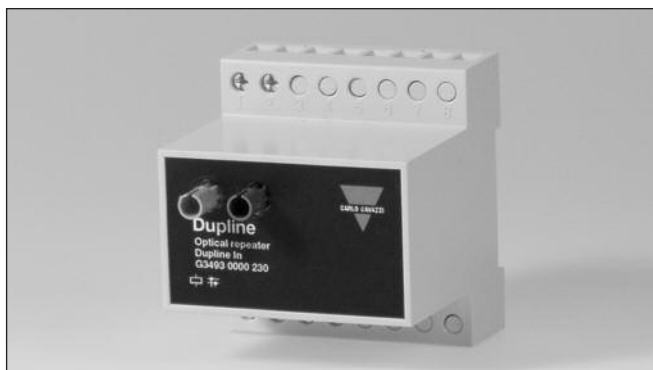

- Converts Dupline® for transmission on optical fibre
- Runs on optical multimode fibre pairs (50/125, 62.5/125)
- ST type connector
- Up to 5 km optical transmission distance with 62.5/125 fibre
- DIN-rail mounting
- LED-indications for supply and fibre connection
- AC power supply

Product Description

The G34930000 converts the Dupline® signal for transmission on optical multimode fibre pairs (50/125, 62.5/125). The G34930000 always operates together with a G34920000, which converts

the signal back from optical to electrical representation via a built-in channel generator output stage. Up to 5 km optical transmission distance can be achieved.

Ordering Key

G 3493 0000 230

Type: Dupline®

Function

Power supply

Type Selection

Supply

115/230 VAC
24 VAC

Ordering no. Optical-to-Electrical Converter

G 3492 0000 230
G 3492 0000 024

Ordering no. Electrical-to-Optical Converter

G 3493 0000 230
G 3493 0000 024

Supply Specifications

Power supply	AC-Types	Overvoltage cat. III (IEC 60664)
Rated operational voltage through term. 21 & 24 jumper term. 22 & 23	230	230 VAC ± 15% (IEC 60038)
*) through term. 21 & 22 jumper term. 24 & 22 jumper term. 21 & 23	115	115 VAC ± 15% (IEC 60038)
through term. 21 & 22	024	24 VAC ± 15% (IEC 60038)
Frequency		45 to 65 Hz
Rated operational power		Typ. 3 W
Power dissipation		≤ 4 W
Rated impulse withstand voltage	230 V 115 V 024 V	4 kV 2.5 kV 800 V
Dielectric voltage Supply - Dupline®		≥ 4 kVAC (rms)

Input/Output Specifications





Optical Interface	
Optical fibre type	Multimode Glass fibre
Dimensions	50/125 or 62.5/125
Connectors	ST plugs
Optical power budget @ 25°C	15dB (62.5/125 µm fibre) 10.5dB (50/125 µm fibre)
Transmission distance	Up to 5 km (62.5/125 fibre)
Output (G 3492 0000 only)	
Number of outputs	Secondary Dupline®
Output voltage	1
Current	8.2 VDC
Short-circuit protection	≤ 40 mA
Sequence time	≤ 60 s
Dupline® transmission delay from	Follows primary Dupline®
- primary to secondary	1 mSec
- secondary to primary	max 1 Dupline® scan 136 mSec

*)When use of 115 VAC, make sure to parallel the terminals as shown.

General Specifications

Power ON delay	< 1.5 s	Humidity (non-condensing)	20 to 80% RH
Indication for Supply ON Dupline® carrier Optical communication	LED, green LED, yellow LED, yellow	Mechanical resistance Shock Vibration	15 G (11 ms) 2 G (6 to 55 Hz)
Environment Degree of protection Pollution degree Operating temperature Storage temperature	IP 20 3 (IEC 60664) 0° to +50°C (+32° to +122°F) -20° to +85°C (-4° to +185°F)	Dimensions Material (see "Technical Information") Weight	H4-housing 250 g

Wiring Diagrams

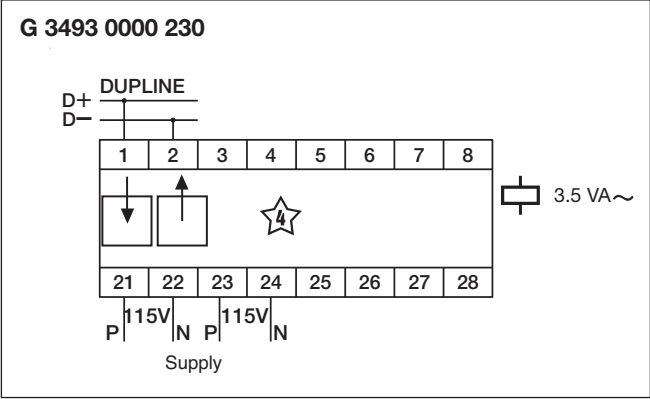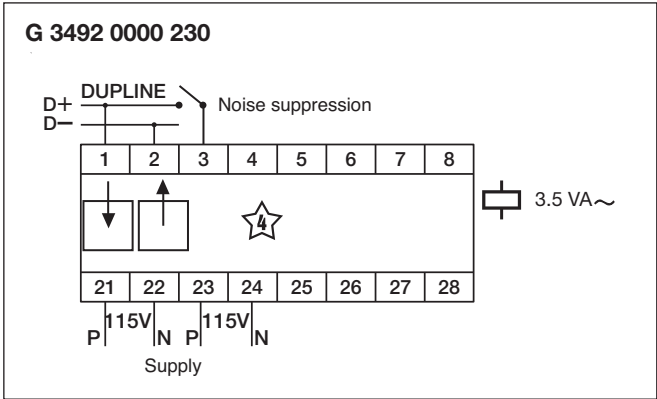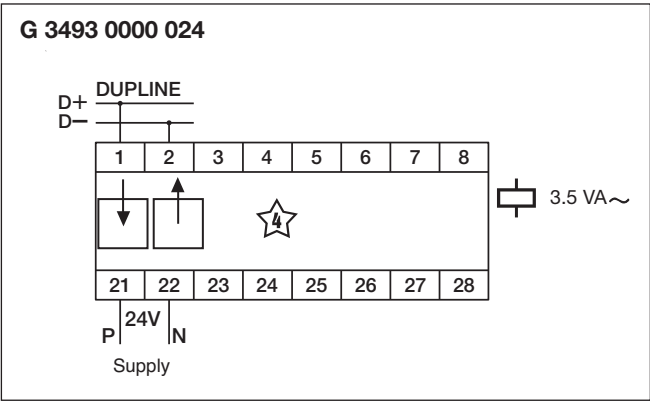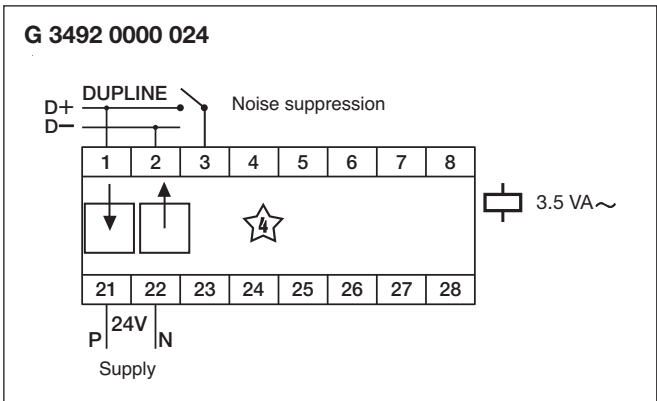

Mode of Operation


The Dupline® Optical Converters enable the use of glass fibre as transmission media on one or more sections of a Dupline® Fieldbus network. The possibility to freely combine electrical and optical media makes it easier to adapt the Dupline® Field-

bus to the system requirements. Optical Fibres can be useful when Dupline® signals have to be transmitted outdoor in geographical areas with frequent thunderstorms, or in case of sections with heavy noise induction.

The G 3493 0000 converts the Dupline® signal from electrical to optical level, while the G 3492 0000 with built-in channel generator converts the carrier signal back from optical to electrical level (secondary Dupline®). Up to 5 km distance can be achieved

on the glass fibre, which can have the dimensions 50/125 or 62.5/125. Two optical fibres are required for connecting the two Optical Converter Units.

Application

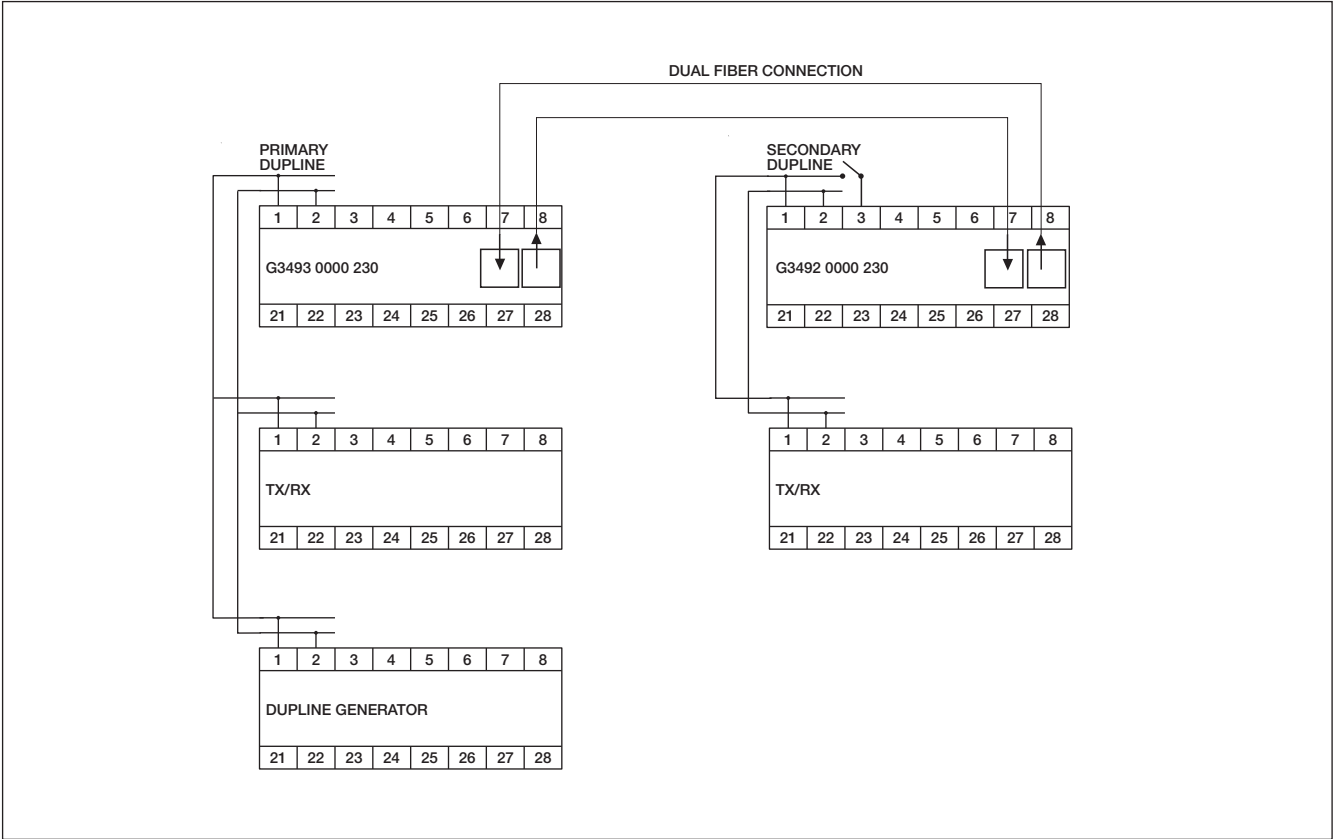

Dimensions (mm)

