
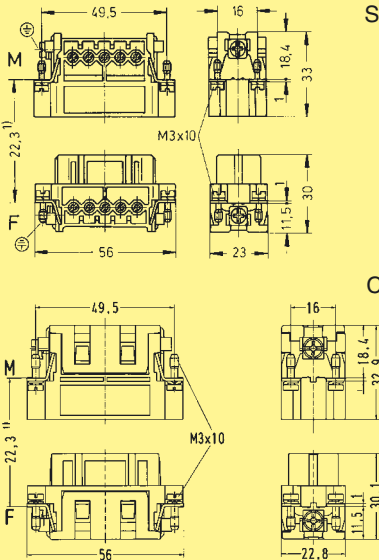




Number of contacts

10 +

Inserts



Identification		Series	Male insert (M)	Female insert (F)	Drawing	Dimensions in mm
Screw terminal		Han A®	09 20 010 2612	09 20 010 2812	Screw terminal	
						
Crimp terminal Order crimp contacts separately		Han A®	09 20 010 3001	09 20 010 3101	Crimp terminal	
					1) Distance for contact max. 24 mm Contact arrangement View from termination side 	
					Panel cut out for inserts for use without hoods/housings	
						

		Wire gauge	Part No.																																			
Identification		(mm ²)	Male contacts	Female contacts	Drawing	Dimensions in mm																																
Crimp contacts																																						
Power contacts																																						
silver plated		0.5	09 33 000 6121	09 33 000 6220		Operating contact Identification																																
		0.75	09 33 000 6114	09 33 000 6214																																		
		1.0	09 33 000 6105	09 33 000 6205																																		
		1.5	09 33 000 6104	09 33 000 6204																																		
		2.5	09 33 000 6102	09 33 000 6202																																		
		3	09 33 000 6106	09 33 000 6206																																		
	4	09 33 000 6107	09 33 000 6207																																			
gold plated		0.5	09 33 000 6122	09 33 000 6222	Crimp contact identification <table><tr><th>Identification</th><th colspan="2">Wire gauge</th><th>Stripping length</th></tr><tr><td>no groove</td><td>0.5 mm²</td><td>AWG 20</td><td>7.5 mm</td></tr><tr><td>1 groove*</td><td>0.75 mm²</td><td>AWG 18</td><td>7.5 mm</td></tr><tr><td>1 groove</td><td>1 mm²</td><td>AWG 18</td><td>7.5 mm</td></tr><tr><td>2 grooves</td><td>1.5 mm²</td><td>AWG 16</td><td>7.5 mm</td></tr><tr><td>3 grooves</td><td>2.5 mm²</td><td>AWG 14</td><td>7.5 mm</td></tr><tr><td>wide groove</td><td>3.0 mm²</td><td>AWG 12</td><td>7.5 mm</td></tr><tr><td>no groove</td><td>4 mm²</td><td>AWG 12</td><td>7.5 mm</td></tr></table>		Identification	Wire gauge		Stripping length	no groove	0.5 mm ²	AWG 20	7.5 mm	1 groove*	0.75 mm ²	AWG 18	7.5 mm	1 groove	1 mm ²	AWG 18	7.5 mm	2 grooves	1.5 mm ²	AWG 16	7.5 mm	3 grooves	2.5 mm ²	AWG 14	7.5 mm	wide groove	3.0 mm ²	AWG 12	7.5 mm	no groove	4 mm ²	AWG 12	7.5 mm
	Identification	Wire gauge		Stripping length																																		
	no groove	0.5 mm ²	AWG 20	7.5 mm																																		
	1 groove*	0.75 mm ²	AWG 18	7.5 mm																																		
	1 groove	1 mm ²	AWG 18	7.5 mm																																		
	2 grooves	1.5 mm ²	AWG 16	7.5 mm																																		
3 grooves	2.5 mm ²	AWG 14	7.5 mm																																			
wide groove	3.0 mm ²	AWG 12	7.5 mm																																			
no groove	4 mm ²	AWG 12	7.5 mm																																			
	0.75	09 33 000 6115	09 33 000 6215																																			
	1.0	09 33 000 6118	09 33 000 6218																																			
	1.5	09 33 000 6116	09 33 000 6216																																			
	2.5	09 33 000 6123	09 33 000 6223																																			
	4.0	09 33 000 6119	09 33 000 6221																																			

* on the back crimp collar

* on the back crimp collar

Stock items in bold type