


$$6 + \text{Ⓜ}$$


Han
E / EE

¹⁾ Distance for contact max. 21 mm

	a	b	c	d
Han E® screw	18	33	18	35
Han® ES / Han E® crimp	19	34	19	36
Han ESS	34	49	32	49

Contact arrangement
View from termination side

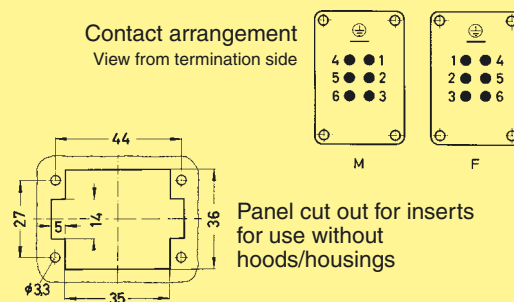

Crimp contact identification

Identification	Wire gauge		Stripping length
no groove	0.14-0.37 mm ²	AWG 26-22	7,5 mm
no groove	0.5 mm ²	AWG 20	7.5 mm
1 groove*	0.75 mm ²	AWG 18	7.5 mm
1 groove	1 mm ²	AWG 18	7.5 mm
2 grooves	1.5 mm ²	AWG 16	7.5 mm
3 grooves	2.5 mm ²	AWG 14	7.5 mm
wide groove	3.0 mm ²	AWG 12	7.5 mm
no groove	4 mm ²	AWG 12	7.5 mm

* on the back crimp collar

Use of the coding pin prevents incorrect mating to other connectors of the same type.

The male pin should be omitted from the opposing cavity in the male insert.

