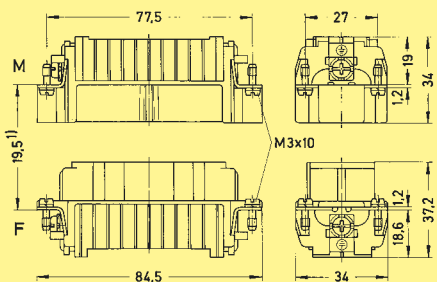



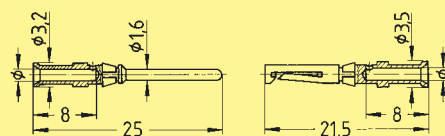
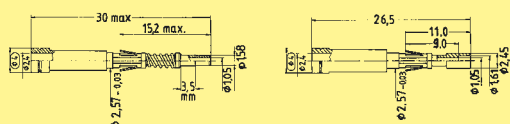


Number of contacts

40+


Inserts

Identification	Series	Part No.		Drawing	Dimensions in mm
		Male insert (M)	Female insert (F)		
Crimp terminal Order crimp contacts separately 	Han D®	09 21 040 3001	09 21 040 3101	 1) Distance for contact max. 21 mm Contact arrangement View from termination side 	
Wrap terminal 1 x 1 mm 	Han D®	09 21 040 2601	09 21 040 2701	Panel cut out for inserts for use without hoods/housings 	

Identification	Wire gauge	Part No.		Drawing	Dimensions in mm
	(mm ²)	Male contacts	Female contacts		
Crimp contacts					
silver plated	0.14-0.37	09 15 000 6104	09 15 000 6204		
	0.5	09 15 000 6103	09 15 000 6203		
	0.75	09 15 000 6105	09 15 000 6205		
	1.0	09 15 000 6102	09 15 000 6202		
	1.5	09 15 000 6101	09 15 000 6201		
	2.5	09 15 000 6106	09 15 000 6206		
gold plated	0.14-0.37	09 15 000 6124	09 15 000 6224		
	0.5	09 15 000 6123	09 15 000 6223		
	0.75	09 15 000 6125	09 15 000 6225		
	1.0	09 15 000 6122	09 15 000 6222		
	1.5	09 15 000 6121	09 15 000 6221		
	2.5	09 15 000 6126	09 15 000 6226		
FOC contacts for 1 mm plastic fibre		20 10 001 3212	20 10 001 3222		

Stock items in bold type