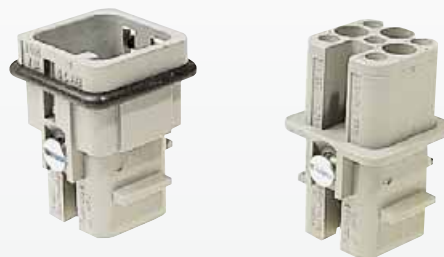
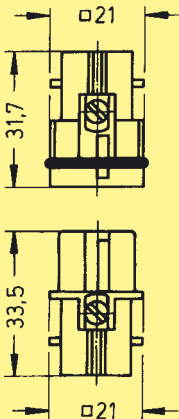






Number of contacts

7 +



Inserts

Identification		Part No.		Drawing	Dimensions in mm
Series	Male insert (M)	Female insert (F)			
Crimp terminal Order crimp contacts separately	Han D®	09 21 007 3031 ¹⁾	09 21 007 3131 ¹⁾	M F 	Contact arrangement View from termination side  
¹⁾ Attention Only for thermoplastic hoods/housings					
Coding system with loss of contact		09 33 000 9915	To avoid accidental incorrect mating of adjacent connectors a coding system is required. Coding is effected by means of a code pin to be inserted into the selected chamber of the female insert. The opposite male contact should be omitted. 		

Identification		Wire gauge (mm ²)	Male contacts	Part No. Female contacts	Drawing	Dimensions in mm																												
Crimp contacts																																		
silver plated		0.14-0.37	09 15 000 6104	09 15 000 6204																														
		0.5	09 15 000 6103	09 15 000 6203																														
		0.75	09 15 000 6105	09 15 000 6205																														
		1.0	09 15 000 6102	09 15 000 6202																														
		1.5	09 15 000 6101	09 15 000 6201																														
		2.5	09 15 000 6106	09 15 000 6206																														
gold plated		0.14-0.37	09 15 000 6124	09 15 000 6224	<table border="1"><thead><tr><th colspan="2">Wire gauge</th><th>ø</th><th>Stripping length</th></tr></thead><tbody><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>0.90 mm</td><td>8 mm</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>1.10 mm</td><td>8 mm</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>1.30 mm</td><td>8 mm</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></tbody></table>	Wire gauge		ø	Stripping length	0.14-0.37 mm ²	AWG 26-22	0.90 mm	8 mm	0.5 mm ²	AWG 20	1.10 mm	8 mm	0.75 mm ²	AWG 18	1.30 mm	8 mm	1 mm ²	AWG 18	1.45 mm	8 mm	1.5 mm ²	AWG 16	1.75 mm	8 mm	2.5 mm ²	AWG 14	2.25 mm	6 mm	
	Wire gauge		ø	Stripping length																														
	0.14-0.37 mm ²	AWG 26-22	0.90 mm	8 mm																														
	0.5 mm ²	AWG 20	1.10 mm	8 mm																														
	0.75 mm ²	AWG 18	1.30 mm	8 mm																														
	1 mm ²	AWG 18	1.45 mm	8 mm																														
1.5 mm ²	AWG 16	1.75 mm	8 mm																															
2.5 mm ²	AWG 14	2.25 mm	6 mm																															
	0.5	09 15 000 6123	09 15 000 6223																															
	0.75	09 15 000 6125	09 15 000 6225																															
	1.0	09 15 000 6122	09 15 000 6222																															
	1.5	09 15 000 6121	09 15 000 6221																															
	2.5	09 15 000 6126	09 15 000 6226																															
FOC contacts for 1 mm plastic fibre			20 10 001 3212	20 10 001 3222																														

Stock items in bold type