
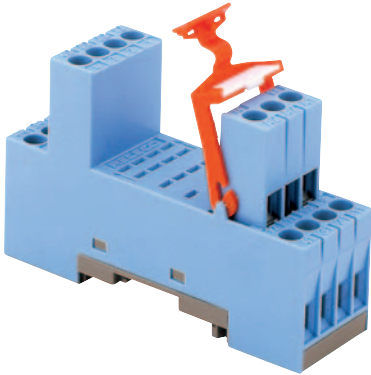



**QRC series**  
**S9-M**  
**Socket for miniature 4 pole relay C9-...**

|                                       |                                                                    |
|---------------------------------------|--------------------------------------------------------------------|
| Type                                  | <b>S9-M</b><br>4-pole, 2 level<br>ntegrated clip and marking label |
| Rated current                         | <b>6 A</b>                                                         |
| Specifications                        |                                                                    |
| Rated load                            | 6 A/250 V                                                          |
| Insulation                            | Test voltage V rms 1 min                                           |
| – All terminals/DIN rail              | 2,5 kV                                                             |
| – Terminal/terminal                   | 2,5 kV                                                             |
| Cross-section of connecting wire      |                                                                    |
| – Single-wire                         | 4 mm <sup>2</sup> or 2 x 2,5 mm <sup>2</sup>                       |
| – Multi-wire                          | 22 - 14 AWG                                                        |
| Max. screw torque                     | 1,2 Nm                                                             |
| Screw dimensions                      | M3, Pozi, slot                                                     |
| Integrated retaining clip/plastic     | for relay series C9                                                |
| Labelling space                       | detachable                                                         |
| Connection label                      | 1...14; DIN/EN                                                     |
| Mounting                              | DIN rail TS35 or mounting plate                                    |
| Ambient temperature operation/storage | -40 (no ice)...60 °C /-40 ... 80 °C                                |




Socket for 4 poles, QRC relays
 **C9-A, C9-E, C9-R**

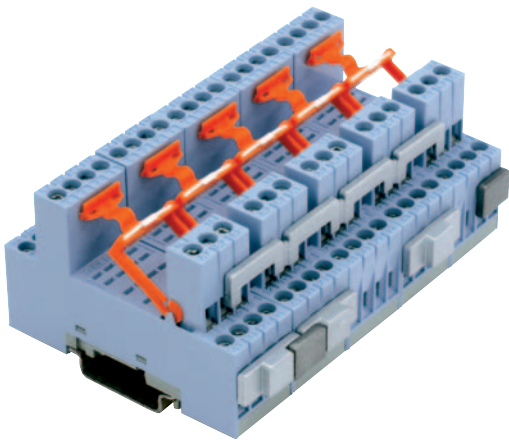

Connection diagram

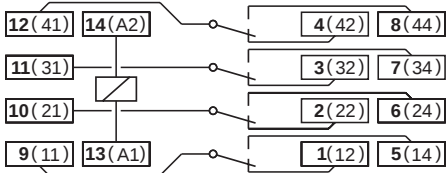

Dimensions [mm]

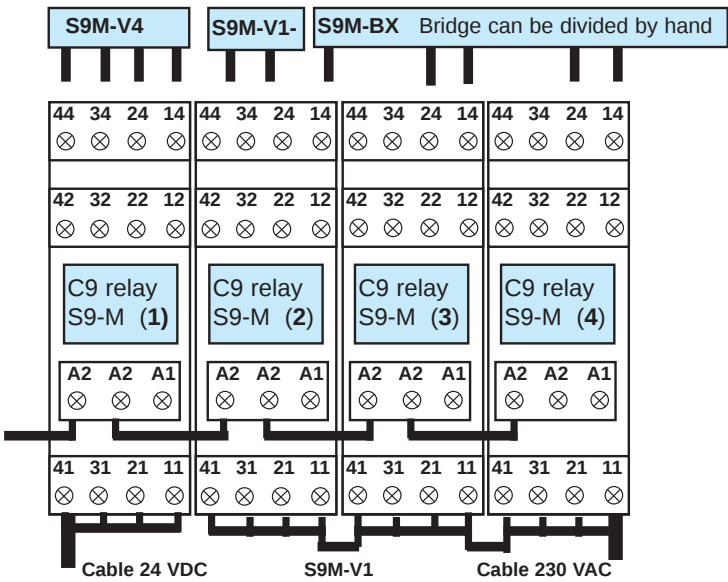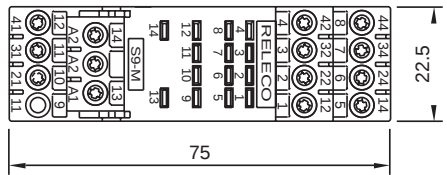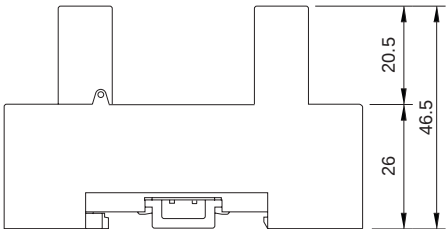

Technical approvals, conformities



(D) (S) (FI) (N) EN 60947-1, EN 61810-5