

Project · Reference number

Date

**Application**

Wall luminaire for many lighting tasks  
on or in buildings.

Ideal for places where a soft and uniform  
light distribution is required.

**Product description**

Luminaire made of aluminium alloy, aluminium  
and stainless steel

Opal glass

Mounting plate with 3 fixing holes  $\varnothing$  5.5 mm

Angle 120° · Pitch circle  $\varnothing$  85 mm

2 cable entries for through-wiring of mains  
supply cable up to  $\varnothing$  10.5 mm

max. 3 x 1.5<sup>□</sup>

Plug connection

Connecting terminal 2.5<sup>□</sup>


Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 44

Protected against granular foreign bodies  
> 1 mm and splash water

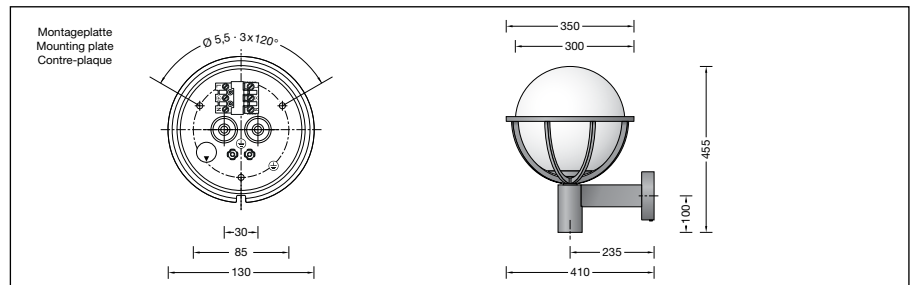
 – Safety mark

**CE** – Conformity mark

Weight: 4.3 kg



[www.bega.com](http://www.bega.com)

**Lamp**

Luminaire with lampholder E 27

Lamp wattage max. 100 W

High voltage tungsten halogen lamp · E 27

Osram: Halogen Eco Classic A 77 W 1320 lm

Philips: Eco Classic A-shape 70 W 1200 lm

Compact fluorescent lamp

TC-TSE 20 W · E 27

Osram: DINT LL 18 W 1140 lm

Philips: Genie 18 W 1145 lm

Sylvania: Mini Lynx Fast Start 20 W 1200 lm

Please note the lamp manufacturers' operating  
instructions.

**Accessory**

Corner block for installation of wall lights on a  
house corner.

**410** Corner block

A separate instructions for use can be provided  
upon request.