

## plug - with screwless terminals

### Product description

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Order number           | 2148                                              |
| EAN/pcs                | 4024941021487                                     |
| Product Group          | Quick-Connect plug with Multi-Grip cable gland    |
| Amperage               | 32A                                               |
| Poles                  | 5p (3p+N+PE)                                      |
| Earth 'Clock' Position | 6 h                                               |
| Voltage                | 200/346 up to 240/415V                            |
| Frequency              | 50 and 60Hz                                       |
| Protection             | IP44                                              |
| Color code             | red RAL 3000                                      |
| Connection Design      | screwless spring-clamp technology as spring clamp |
| Max. conductor         | 6,0 mm <sup>2</sup>                               |




### Further Information

|                                  |                                                                                                                                                                      |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Additional technical information | Screwless housing connection with snap fastening<br>Multi-Grip cable gland with gasket and integrated strain relief<br>For cable diameter from 11 up to max. 23,5 mm |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Material

|                           |                                                           |
|---------------------------|-----------------------------------------------------------|
| Material of Enclosure     | Polyamide                                                 |
| Contact / Contact Carrier | contact carrier made of polyamide, the contacts are brass |
| Weight/pcs                | 0.265 kg                                                  |
| Packaging unit            | 10 pcs                                                    |

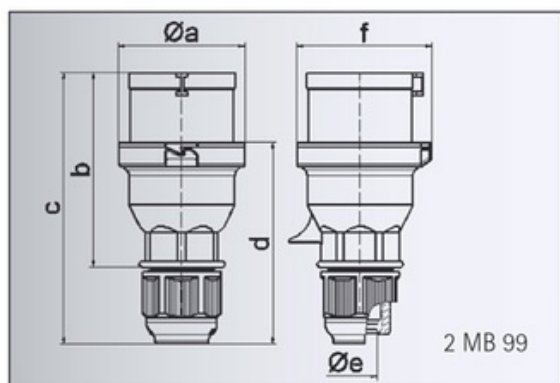

|                |       |       |       |       |       |       |
|----------------|-------|-------|-------|-------|-------|-------|
| Ampere         | 16    | 16    | 16    | 32    | 32    | 32    |
| Polzahl        | 3     | 4     | 5     | 3     | 4     | 5     |
| a ø            | 53,0  | 60,0  | 66,0  | 74,5  | 74,5  | 74,5  |
| b              | 93,5  | 100,5 | 103,0 | 121,0 | 121,0 | 121,5 |
| c              | 134,0 | 141,0 | 142,0 | 174,0 | 174,0 | 174,5 |
| d              | 97,5  | 104,5 | 105,5 | 128,0 | 128,0 | 128,5 |
| e ø            | 18,0  | 18,0  | 18,0  | 23,0  | 23,0  | 23,0  |
| f              | 57,5  | 64,5  | 70,5  | 78,0  | 78,0  | 80,0  |
| Leiter mm² min | 1     | 1     | 1     | 2,5   | 2,5   | 2,5   |
| Leiter mm² max | 2,5   | 2,5   | 2,5   | 6     | 6     | 6     |
|                |       |       |       |       |       |       |
|                |       |       |       |       |       |       |
|                |       |       |       |       |       |       |