


D

Couvercle universel

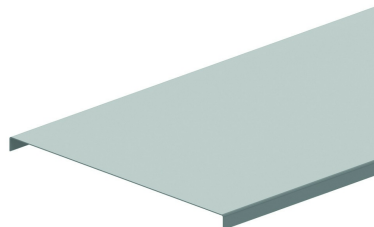

Pour cheminements horizontaux et verticaux.
 Couverture avec un bord de 10 mm.

Exec. Std.	Sendzimir
Mat. Opt.	zinc-magnésium
Mat. Opt. PE	Revêtement en poudre

HD	Référence	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Magasin	Unité
-	D050	10	50		3000	0,350	30	X	M
-	D075	10	75		2000	0,500	20	X	M
-	D100	10	100		2000	0,703	20	X	M
-	D150	10	150		2000	1,170	20	X	M
-	D200	10	200		2000	1,420	20	X	M
-	D250	10	250		2000	1,850	20	X	M
-	D300	10	300		2000	2,100	20	X	M
-	D400	10	400		2000	4,150	20	X	M
-	D500	10	500		2000	5,000	2	X	M
-	D600	10	600		2000	5,650	2	X	M
-	ZMD050	10	50		3000	0,328	30	X	M
-	ZMD075	10	75		2000	0,445	20	X	M
-	ZMD100	10	100		2000	0,562	20	X	M
-	ZMD150	10	150		2000	0,796	20	X	M
-	ZMD200	10	200		2000	1,030	20	X	M
-	ZMD250	10	250		2000	1,580	20	X	M
-	ZMD300	10	300		2000	1,872	20	X	M
-	ZMD400	10	400		2000	2,948	20	X	M
-	ZMD500	10	500		2000	3,650	2	X	M
-	ZMD600	10	600		2000	4,352	2	X	M

A fixer avec:



Attache couvercle
encliquetable
DCLVF35



Attache couvercle
encliquetable
DCLVF

Pour des largeurs > 400 mm: le couvercle est pourvu de nervures de renfort.