
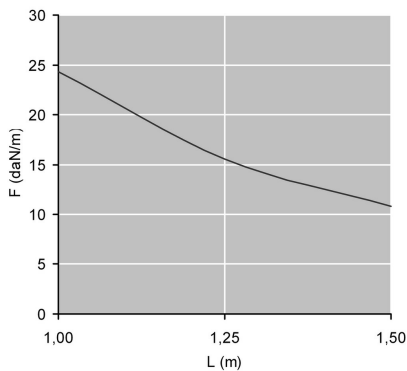


NATO15

Scheepskabelbaan

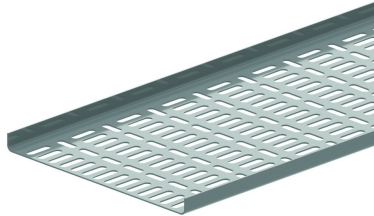

Langs- en dwarsperforaties
Rechte boord

Stand. Uitv.		Sendzimir							
Mat. Opt.		Hot-Dip							
Mat. Opt. PE		Poedercoating							
HD Artikel		↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Eenh.
HD NATO15.050.125		15	50	1,25	2000	0,730	40	X	M
HD NATO15.100.125		15	100	1,25	2000	1,050	20	X	M
HD NATO15.150.125		15	150	1,25	2000	1,350	20	X	M
HD NATO15.200.125		15	200	1,25	2000	1,700	20	X	M
HD NATO15.300.125		15	300	1,25	2000	2,400	20	X	M

BELASTINGSDIAGRAM


Doorlopend gemonteerd met koppelingen 1/5 van de ondersteuningspunten. Gelijmatig verdeelde belasting.
Veiligheidscoëfficiënt = 2.

F = max. toelaatbare belasting (daN/m)

L = steunafstand (m)

L/200 = doorbuiging (m)

Te bevestigen met:



Knipkoppelplaat
V15.200