


PRODUCT-DETAILS

OVR T1-T2 N3 12.5-275s P QS

OVR T1-T2 N3 12.5-275s P QS Surge Protective Device

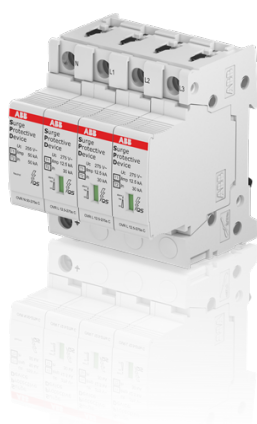

Algemene informatie

Type	OVR T1-T2 N3 12.5-275s P QS
Artikelnummer	2CTB815710R2100
EAN	3660308525000
Omschrijving	OVR T1-T2 N3 12.5-275s P QS Surge Protective Device
Omschrijving	OVR T1-T2 N3 12.5-275s P QS Surge Protective Device

Technical

Normen	IEC 61643-11 / EN 61643-11
Type laagspanningsdistributiesysteem	TT TN-S
Geschikt voor	To protect the systems against the transient overvoltage (lightning)
Nominale AC-spanning van het systeem (U_o)	230 / 400 V
Voltageklasse DC	350 V
Beveiligingsniveau (peil) (U_p)	(L-N) 1.4 kV (N-PE) 1.4 kV (L-PE) 1.5 kV
Maximale continue bedrijfsspanning (U_c)	(L-PE) 275 V (L-L) 440 V (L-N) 275 V

	(N-PE) 255 V
Tijdelijke overspanningstestwaarde (U_T)	(L-N) 337 V (N-PE) 1200 V
Afvoerstroom	Nominal 20 kA Maximum 80 kA Total 100 kA
Impulsstroom	I (imp, 10 / 350 μ s) 12.5 kA I (total, 10 / 350 μ s) 50 kA
Bliksem impulsstroom	12,5
Kortsluitingsbestendig I_{cc}	100 kA
Volg doofstroomcapaciteit als (I fi)	(L-N) - kA (N-PE) 0.1 kA
Vermogensverlies	63 mW
Beschermende apparaten met kortsluiting	Curve B Breakers $\leq$ 125 A Curve C Breakers $\leq$ 125 A gL Type Fuses $\leq$ 160 A gG Type Fuses $\leq$ 160 A
Arresterklasse	I II
Aantal polen	4
Aantal beveiligde polen	4
Positie van neutrale klemmen	Left
Versie	Plug-in
Montagetype	DIN rail (top hat rail) 35 mm
Producttype	QS
Geleverde opties	Industry, commercial building
Preventief onderhoud	Yes
Statusindicator	Yes
Zekeringgrootte	4 modular spacing

Environmental

Beschermingsgraad	IP20
Maximale werkhoogte toegestaan	Without Derating 5000

Dimensions

Breedte in module-eenheden	4
Product netto breedte	71.2 mm
Product netto hoogte	88 mm
Product netto diepte	76.7 mm
Product netto gewicht	0.6 kg

Container Information

Pakketniveau 1 Units	1 stuk
Pakketniveau 1 Breedte	117 mm

Pakketniveau 1 Hoogte	82 mm
Pakketniveau 1 Lengte	77 mm
Pakketniveau 1 Brutogewicht	630 g
Pakketniveau 1 EAN	3660308525000

Ordering

Minimale bestelhoeveelheid	1 stuk
Nummer douanetarief	85363090
Land van herkomst	Bulgaria (BG)

Certificates and Declarations (Document Number)

CQC-certificaat	9AKK107680A1975
Verklaring	2CTC432056G1701
Conformiteitsverklaring - CE	9AKK108466A4617
EAC-certificaat	2CTC436008G1701
Instructies en handleidingen	2CTC431030M1701

Popular Downloads

Gegevensblad, technische informatie	2CTC431047D0201
Instructies en handleidingen	2CTC431030M1701
Mechanische tekeningen	2CTC800015F2000.pdf 2CTC800015F2001.dxf 2CTC800015F2002.stp 2CTC800015F2003.igs

Classifications

ETIM 7	EC001457 - Combined arrester for power supply systems
ETIM 8	EC001457 - Combined arrester for power supply systems
WEEE-categorie	5. Small Equipment (No External Dimension More Than 50 cm)
AEEA B2C / B2B	Business To Business
CN8	85363090
eClass	V11.0 : 27130808
Object classificatiecode	141BCC

Categorieën

Laagspanningsproducten en -systemen → Modulaire DIN rail producten → Overspanningsbeveiliging (SPD) → Overspanningsbeveiliging SPD klasse I → Type T1 - T2

