


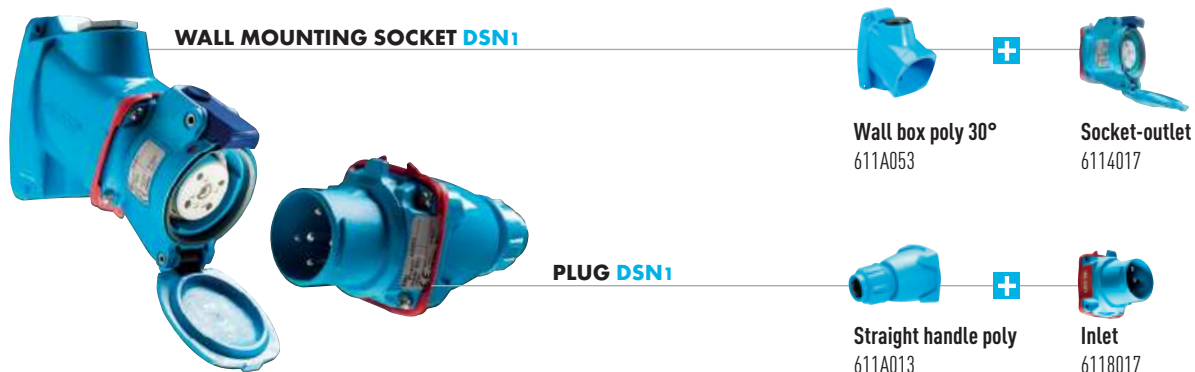

MAIN FEATURES

Rated current (with wiring according to standard)	20 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	500 V	Flexible wiring (min-max)	1 - 2,5 mm ²
IP protection lid closed	IP66/IP67	Stranded wiring (min-max)	1,5 - 4 mm ²
IP protection connected plug	IP66/IP67	Other wiring	on request
Shock resistance	IK08	Keying positions	24

LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	20 A / 500 V
Load-break capability according to IEC EN 60947-3 / AC-22A	20 A / 500 V
Load-break capability according to IEC EN 60947-3 / AC-23A	20 A / 400 V
Short-circuit current I _{cc}	10 kA

DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

		SOCKET-OUTLET female DSN ¹ (20 A)	INLET male DSN ¹ (20 A)
Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	611408A	611808A
190 - 230 V	3P+E	6114033	6118033
220 - 250 V	1P+N+E	6114015	6118015
380 - 440 V	3P+E	6114013	6118013
220 - 250 V 380 - 440 V	3P+N+E	6114017	6118017
480 - 500 V	3P+E	6114093	6118093
480 - 500 V	3P+N+E	6114097	6118097

Other voltages, frequencies and polarities are available on request (see page 8)



CERTIFICAT N°
FR 60042266D