


SuperCat Outdoor CAT 6 U/UTP

U/UTP Installation cable

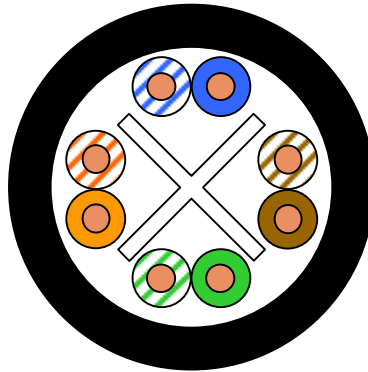

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T;
IEEE 802.5 16 MB; ISDN; TPDDI; ATM

Standards


EIA/TIA-568-B.2-1 6/2002.
ISO/IEC 11801 2nd ed.; IEC 61156-5
EN 50173-1, EN 50288-6-1

Water penetration rating

IEC 60794-1-2F5, methode B

Construction

Conductor	bare copper wire Ø 0.58 mm (AWG23)
Insulation	Polyethylene, Ø 1.1 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core non metallic cross separator (spline)
Sheath	PE, Black



SuperCat Outdoor CAT 6 U/UTP

Mechanical properties

Minimum bending radius	Installation	8 x D
	Installed	4 x D
Temperature range	during operation	-55°C up to + 60°C
	during installation	-15°C up to + 50°C
Max tensile load	during operation	-
	during installation	100N

Electrical properties

at 20°C


DC loop resistance	≤ 176 Ω /km
Resistance unbalance	≤ 2%
Insulation resistance (500 V)	≥ 5000 MΩ *km
Capacitance at 800 Hz	Nom. 48 nF/km
Capacitance unbalance (pair to ground)	≤ 1500 pF/km
Characteristic impedance (1 - 100 MHz) (100 - 250 MHz)	(100 ± 15) Ω
	(100 ± 22) Ω
Nominal velocity of propagation	Approx. 67 %
Propagation delay	Nominal 535 ns/100m
Delay skew	Nominal 20 ns/100m
Test voltage (DC, 1 min)	1000 V
Core/Core	

Nominal transmission characteristics

at 20°C

F (MHz)	Attenuation		NEXT		PS-NEXT *)		ACR		PS-ACR		ELFEXT		PS-ELFEXT		Return loss (dB)
	max.	Nom.	min.	nom.	min.	Nom.	Min.	Nom.	Min.	Nom.	min.	Nom.	min.	Nom.	
1	2.1	1.9	74	78	72	75	72.0	76.1	70.0	73.1	68	82	65	80	20
4	3.8	3.8	65	69	63	66	61.2	65.2	59.2	62.2	56	70	53	68	23
10	6.0	6.0	59	63	57	60	53.0	57.0	51.0	54.0	48	62	45	60	25
16	7.6	7.6	56	60	54	57	48.4	52.3	46.4	49.3	44	58	41	56	25
20	8.5	8.5	55	59	53	56	46.5	50.0	44.5	47.0	42	56	39	54	25
31.2	10.7	10.7	52	56	50	53	41.3	45.0	39.3	42.0	38	52	35	50	23.6
62.5	15.5	15.1	47	51	45	48	31.5	36.0	29.5	33.0	32	46	29	44	21.5
100	19.9	19.1	44	48	42	45	24.1	28.9	22.1	25.9	28	42	25	40	20.1
125	22.5	21.3	43	47	41	44	20.5	25.2	18.5	22.2	26	40	23	38	19.5
155.5	25.4	23.8	42	45	40	42	16.6	21.3	14.6	18.3	24	38	21	36	18.8
175	27.1	25.3	41	44	39	41	13.9	19.1	11.9	16.1	23	37	20	35	18.4
200	29.2	27.0	40	44	38	41	10.8	16.5	8.8	13.5	22	36	19	34	18.0
250	33.0	32.0	38	42	36	39	5.0	10.0	2.0	7.0	20	34	17	32	17.3
300		36.1		41		38		4.8		1.8		32		30	-
400		41.7		39		36		-2.7		-5.7		30		28	-

*) The dual cable fulfill the additional PSNEXT requirement for multiunit cables given in EN50173-1 and 50288-6-1



SuperCat Outdoor CAT 6 U/UTP

Technical Data

Product name	Type	Colour	Outer dia-meter mm	Fire load MJ/km	Weight kg/km	Delivery form	Material code		DCN no.	El. no
SuperCat U/UTP 4P AWG23 C6	U/UTP	Black	7,2	NA1)	55	DP305	1000968	-00305DP	799330	1089536