

Lighting: Fluorescent Lighting

FE Series: Nonmetallic Fluorescent Lighting Fixtures, Standard and Emergency Battery Back-Up – Increased Safety

Zone 1 & 2 – 21 & 22

II 2 GD

ATEX / IECEx


IP66/67 – IK10

Ordering Information – Standard Version:

Surface/Suspension Mounting and Standard Wiring Version:

Connection via 1 x 6 terminals.

Capacity (flexible/solid): 4 mm²/6 mm².

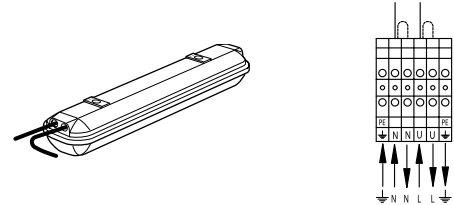

Unarmored Version - Bi-pin (G13):

Three M25 threaded entries, two at one end and one at opposite end, supplied with one M25 polyamide cable gland (dia. 8 to 18.5 mm) and two M25 polyamide plugs.

Number of Lamps	Power (W)	Lamp Type	Voltage (V)	Weight (kg)	Volume (dm ³)	Catalog Number	Old Catalog Number
1	18	G13	110/254	5.5	32.3	FEB118BUSN	091547 or 096547
2	18	G13	110/254	5.5	32.3	FEB218BUSN	091548 or 096548 or 096363
1	36	G13	110/254	7.9	54.2	FEB136BUSN	091553 or 096553
2	36	G13	110/254	7.9	54.2	FEB236BUSN	091555 or 096555 or 096364
3	36	G13	110/254	9.9	54.2	FEB336BUSN	091534 or 096534
1	58	G13	110/254	9	65	FEB158BUSN	091372 or 096372
2	58	G13	110/254	9	65	FEB258BUSN	091373 or 096373
3	58	G13	110/254	11	65	FEB358BUSN	091542 or 096542

Armored Version - Bi-pin (G13):

Two M20 threaded entries with brass earth continuity plate at one end and one M20 plugged clearance entry, supplied with two M20 polyamide plugs.

Number of Lamps	Power (W)	Lamp Type	Voltage (V)	Weight (kg)	Volume (dm ³)	Catalog Number	Old Catalog Number
1	18	G13	110/254	5.5	32.3	FEB118BUSA	091535 or 096535
2	18	G13	110/254	5.5	32.3	FEB218BUSA	091538 or 096538 or 096374
1	36	G13	110/254	7.9	54.2	FEB136BUSA	091543 or 096543
2	36	G13	110/254	7.9	54.2	FEB236BUSA	091545 or 096545 or 096375
3	36	G13	110/254	9.9	54.2	FEB336BUSA	091539 or 096539
1	58	G13	110/254	9	65	FEB158BUSA	091342 or 096342
2	58	G13	110/254	9	65	FEB258BUSA	091343 or 096343
3	58	G13	110/254	11	65	FEB358BUSA	091549 or 096549

Unarmored Version - Mono-pin (Fa6):

Three M25 threaded entries, two at one end and one at opposite end, supplied with one M25 polyamide cable gland (dia. 8 to 18.5 mm) and two M25 polyamide plugs.

Number of Lamps	Power (W)	Lamp Type	Voltage (V)	Weight (kg)	Volume (dm ³)	Catalog Number	Old Catalog Number
2	18	Fa6	110/254	5.5	32.3	FEM218BUSN	091579 or 096579
2	36	Fa6	110/254	7.9	54.2	FEM236BUSN	091588 or 096588
2	58	Fa6	110/254	9	65	FEM258BUSN	091550 or 096550

Armored Version - Mono-pin (Fa6):

Two M20 threaded entries with brass earth continuity plate at one end and one M20 plugged clearance entry supplied with two M20 polyamide plugs.

Number of Lamps	Power (W)	Lamp Type	Voltage (V)	Weight (kg)	Volume (dm ³)	Catalog Number	Old Catalog Number
2	18	Fa6	110/254	5.5	32.3	FEM218BUSA	091367 or 096367
2	36	Fa6	110/254	7.9	54.2	FEM236BUSA	091369 or 096369
2	58	Fa6	110/254	9	65	FEM258BUSA	091382 or 096382