


## Aluminium cables


Extra flexible braided multi-strand cables.  
Transparent PVC sheath, with cable section identification.

Reference	Rating (kA/1 s)	Cable		Section (mm <sup>2</sup> )
		Weight (kg/m)	Ø (mm)	
M-28-50	7.0	0.170	11.5	50
M-28-70	10.0	0.240	13.4	70
M-28-120	17.5	0.430	19.00	120
M-28-150	20.0	0.510	21.00	150

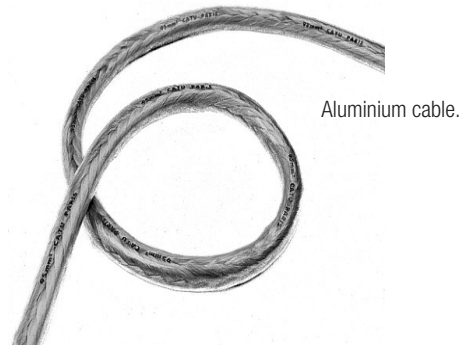

## Jumper cables realisation specially manufactured items

Assembly consisting of three copper cables or braids for short circuiting,  
connected to a copper ground wire through a trifurcating box.

Reference	Characteristics	Rating (kA/1 s)	 Weight
MT-40	3 cables 40 mm <sup>2</sup> - L = 0.75 m 1 earth cable 40 mm <sup>2</sup> - L = 2 m	10	2 300
MT-70/1	3 cables 70 mm <sup>2</sup> with equipped lugs - L = 1.20 m 1 earth cable 35 mm <sup>2</sup> - L = 2 m	14	4 400

