



Inbouwcontactdoos - Bestelnummer 1276

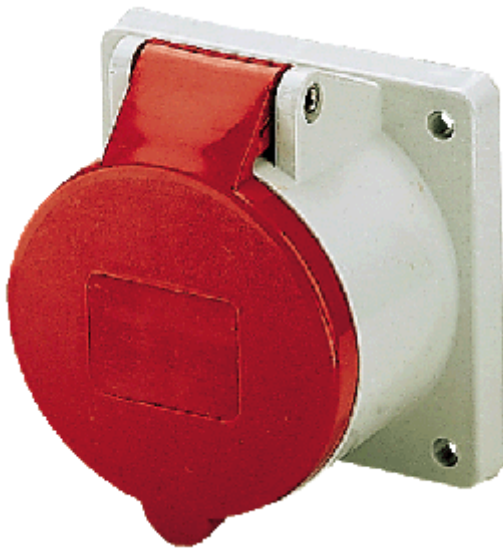

32A, 3- en 4-polig uitsluitend geschikt voor montage op de inbouwdozen 40369 en 40374

Beschermingsgraad	IP 44
Ampère	32A
Polen	5p
Voltage	400V
Hertz	50-60 Hz
Uurstand	6h
Contacten	standaard
Aansluittechniek	schroefklemmen

Verpakkingseenheid 10 Stuks

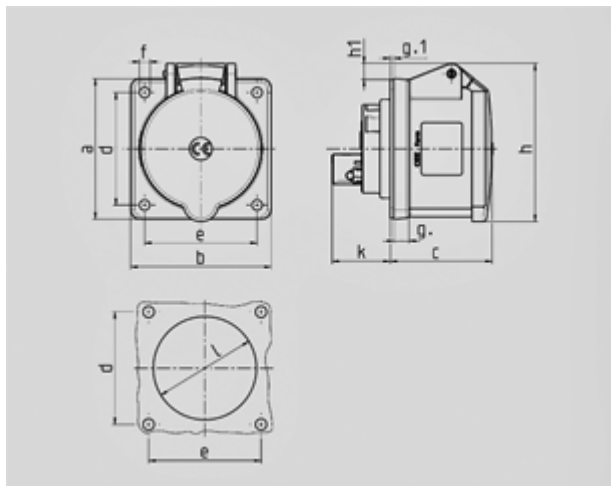

Tekening	Amp.	16			32		
		3	4	5	3	4	5
1 MB 360	Polen						
Maten in mm	a	75	75	75	75	75	75
	b	75	75	75	75	75	75
	c	53	53	55	64	64	64
	d	60	60	60	60	60	60
	e	60	60	60	60	60	60
	f	5,5	5,5	5,5	5,5	5,5	5,5
	g.	8	8	8	8	8	8
	g.1	2	2	2	2	2	2
	h	75	80	85	89	89	95
	h1		6	9	11	11	12
Kabelaansluiting van/tot mm ²	k	31	32	32	39	39	17
	l	43	52	54	58	58	54
		1,5	1,5	1,5	2,5	2,5	2,5
		—4	—4	—4	—10	—10	—10