

COMPACT BUSBAR SUPPORT WITH NEUTRAL CIRCUIT, 1 BUSBARS PER PHASE, 10 MM BUSBAR THICKNESS

CATALOG NUMBER

CBS-B1-10TN



CERTIFICATIONS



FEATURES

- Compact design fits in 400 mm (15 3/4") deep panels
- Includes mounting holes for direct fixing of protection screen
- Installs quickly and easily
- Halogenenvrij
- RoHS compliant

PRODUCT ATTRIBUTES

- Article Number: 551181
- Material: Aluminum;Glass Fibre Reinforced Polyamide
- Max Working Voltage, IEC (Ui): 1,000 VAC;1,500 VDC
- Typical Application Current Rating: 250 – 1,600 A
- Working Temperature: -40 to 130 °C
- Complies With: IEC® 60439.1;IEC® 61439.1;IEC® 60695-2-11 (Glow Wire Test 960 °C)
- Flammability Rating: UL® 94V-0

Busbar Width: 25 – 80 mm

Busbars per Phase: 1

Busbar Thickness: 10 mm

Width: 338 – 390 mm

A: 290 mm

B: 60 mm


C: 325 – 377 mm

D: 65 mm

X: 6.5 x 23 mm

Unit Weight: 0.260 kg

DIAGRAMS

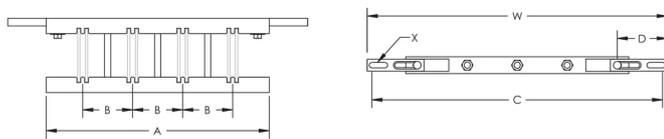

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Noord-Amerika

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europa

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europa

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF**
TRACER