

100603.01

Lucky evo C

Lucky EVO C - LINEAR LED PROFILE

Profile made of painted aluminium alloy.

Integrated electronic driver, fixing springs included.

Diffuser, end caps, junction kit and housing box to be ordered separately.

01 white



novalux
ITALIAN LIGHTING STYLE SINCE 1948

MADE IN
ITALY

Garanzia
novalux
5 anni
years

GRUPPO 0
RISCHIO
FOTOBIOLOGICO

NOVITÀ
NEWS

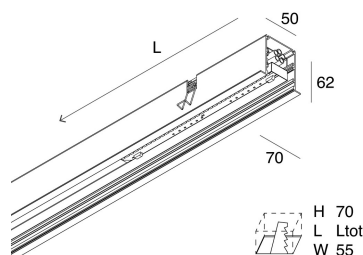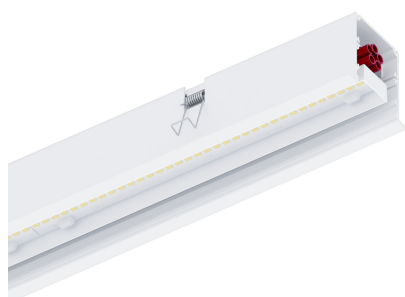

L: 1125 mm



Installations

Lighting system with frame (stand-alone or in a continuous line) for recessed installation in plasterboard ceiling (thickness 10-15mm) or in concrete by an apposite housing box (compulsory accessory).

Material

Body made of painted aluminium alloy.

Wiring

Integrated electronic driver 220-240V 50-60Hz.

Luminaire equipped with 4P+E power supply terminal block (cable section max 2,5mm²). Continuous line connection.

Also available with dimmable DALI/PUSH driver.

Total power: 30W

Power factor: 0.9

Photobiological Risk

Certified device in EXEMPT GROUP, in accordance with CEI EN 62471:2010.

Compliance

In accordance with standard: CEI EN 60598-1:2008 + A11:2009, IEC 60598-2-2.

Sources

Type: PCB LED

Color: white

Power: 25W

Color temperature: 3000K

MacAdam: 3 SDCM

CRI: >80

Nominal flux (Tc=25°C): 3749 lm

Lifespan (Ta=25°C): 50000h L80

Lamp included

Photometric data


Luminous flux (Ta=25°C): aggiungere schermo / add diffuser for lm

100603.01


Lucky evo C

Lucky EVO C - LINEAR LED PROFILE


LUCKY EVO C luminaire photographs

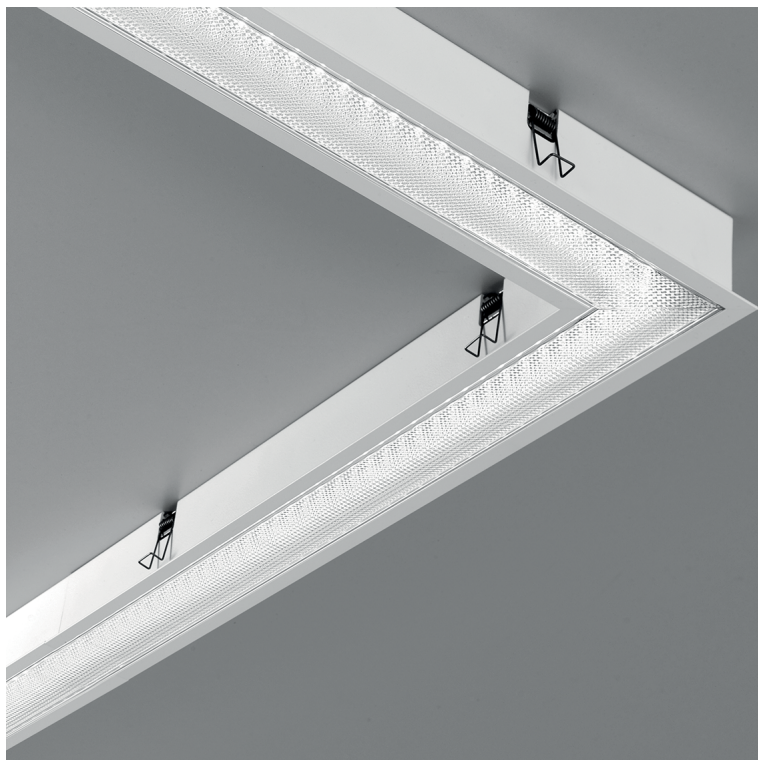


Accessories




100249.99
OPAL flush
diffuser
L=1125mm




1002E0.99
UGR




1002F1.99
OPAL flush
diffuser
L=6000mm




100650.01
End caps (2pcs.)




1002E8.99
UGR



100649.01
Kit for junction



100652.99
Housing box
L=1125mm.



100655.99
End caps for
housing box
(2pcs.)