

M12 MALE 0° B CODED SHIELDED WIREABLE SCREW TERM.

5 POLE max. 0.75mm² 6-8mm PROFIBUS

Male straight

M12, 5-pole

B-coded

shielded

Screw terminals

Sealing range (cable Ø): 6...8 mm




The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)

Afbeelding



Male

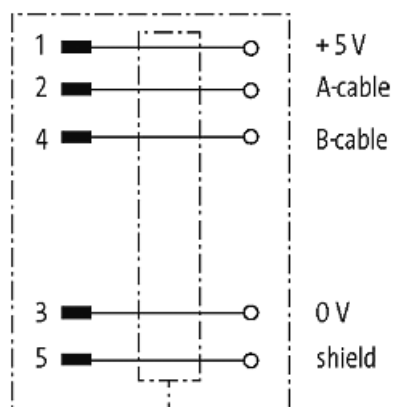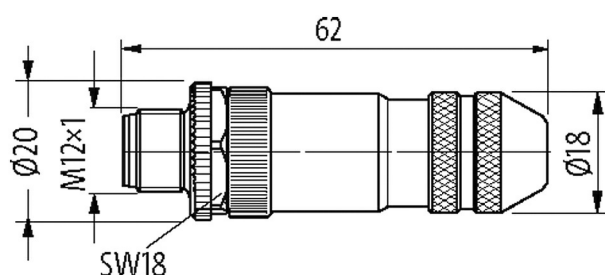

Product van afwijken van afbeelding

Toelatingen

**Meer info****Form**

Form	14001
------	-------

General data

Pollution Degree	3
Dimensions H×W×D	62×20×20 mm
Temperature range	-40...+85 °C

Technical Data

Operating voltage	max. 60 V AC/DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Material group	IEC 60664-1, category II
Connection cross section	max. 0.75 mm²
Coding	B-coded
Sealing range (cable Ø)	6...8 mm
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated
Housing	Zinc die casting, matte nickel plated

Commerciële gegevens

Douane tarief nummer	85366990
EAN	4048879198653
eClass	27279221
Land van oorsprong	DE
Verpakkingseenheid	1