

MICO electronic circuit protection, 4 CHANNELS

IN: 24 V DC OUT: 24 V DC / 1-2-4-6 A



MICO 4.6

4 channels

Current adjustment 1, 2, 4, 6 A

[Link naar het product](#)

Afbeelding

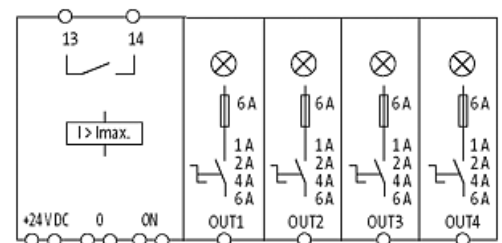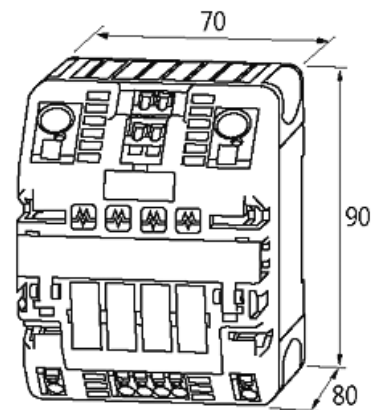

Product van afwijken van afbeelding

Toelatingen

**Input**

Operating voltage	24 V DC (18...30 V DC)
-------------------	------------------------

Output

Current adjustment	1 A, 2 A, 4 A, 6 A, by countersunk rotary switch, sealed
Inrush capacity	max. 20 mF (per channel)

Control inputs

Input voltage (ON)	10...30 V DC
Impulse length (ON)	min. 20 ms

General data

Connection	Spring clamp terminals
Input terminals	2× 16 mm ²
Output terminals	per output 1× 4 mm ²
Alarm terminals	2.5 mm ²
Bridging concept	two sides, with spring clamp terminals or bridge set (max. 40 A)
Mounting method	DIN-rail mountable TH35 (EN 60715)
Dimensions H×W×D	90×70×80 mm
Temperature range	0...+55 °C (storage temperature -40...+80 °C)

Control outputs

Group alarm output	potential free 30 V AC/DC, 100 mA
--------------------	-----------------------------------

Commerciële gegevens

Douane tarief nummer	85363010
EAN	4048879000055
eClass	27141901
Land van oorsprong	CZ
Verpakkingseenheid	1