

Fiber Optic Patchcords

Fumo Communications
Fumo Communications

LL-PT/DX-STLC-62

— Patchcord duplex ST-LC, 62.5/125 μ m —

Connector : ST – full metall body, ceramic ferrule (ZrO₂); LC – plastic body, ceramic ferrule (ZrO₂)
Cable : Zipcord – 62.5/125, LSOH sheath

STANDARD COMPLIANCE

All components of and the final product are designed and tested to conform the requirements of IEC 60874-14, IEC 61754-4 & 20, IEC 60874-10, CECC BFOC/2.5, Bellcore/Telcordia GR-326, EIA/TIA 604-3A, EIA/TIA 568, ISO/IEC 11801 2nd Ed., EN 50173, JIS C5973 F04, ICEA-596, IEC60793-2-10 A1a or IEC60793-2-10 A1b or ITU-T G.651 (depending on fiber dia-meter), Bellcore/Telcordia GR-409-CORE, IEC 793, IEC 794-1-E1, IEC 794-1-E3 UL1666/901 (when UL-cable used and EIA/TIA455). All components are RoHS compliant and do not and will not contain any restricted hazardous substances as detailed in RoHS 2002/95/EC.




PERFORMANCE

Attenuation	: <0,25 dB
Return loss	: >35 dB
Temperature range	: -5° C to +60° C
Color of sheath	: orange <i>other colors on request</i>
Fiber version	: semi-tight buffer; <i>tight buffered on request</i>
Color of boot	: black & red <i>other colors on request</i>
Packaging	: 1 pcs./unit <i>other packaging on request</i>



TECHNICAL SPECIFICATION

ST	TYPE	LC
ZrO ₂ (Zirconia/Ceramic)	MATERIAL OF FERRULE	ZrO ₂ (Zirconia/Ceramic)
convex	CONNECTOR SURFACE	convex
glue	CONNECTION OF FIBER	glue
metal	MATERIAL OF BODY	plastic compound
bayonette	CONNECTION AT ADAPTER	push-pull
>1000	MATING CYCLES	>1000
127 / 128 μ m	FERRULE DRILLING	127 / 128 μ m

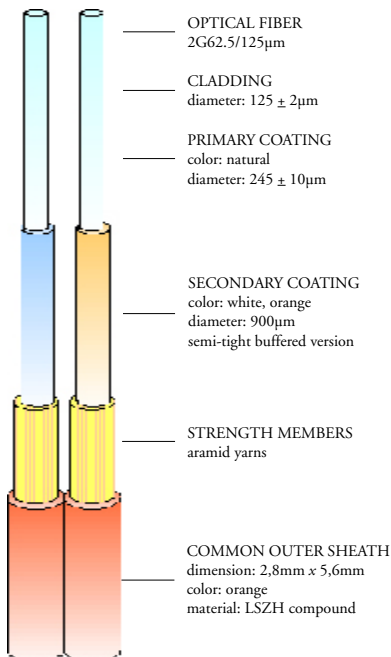


MECHANICAL PERFORMANCE FIBER

Weight	: 15,0kg/km
Temperature range	: -5°C to +70°C
Bending radius	: 40mm
Tensile strength	: 250N (long term) - 450N (short term)
Crush resistance	: 2000N/dm

OPTICAL PERFORMANCE FIBER

Item		62.5/125
CORE DIAMETER	μ m	62,5 \pm 2,5
CLADDING DIAMETER	μ m	125 \pm 2
CLADDING NON-CIRCULARITY	%	\leq 1,0
CORE/CLADDING CONCENTRICITY	μ m	\leq 6,0
TYP. ATTENUATION @ 850nm	dB/km	3,2
TYP. ATTENUATION @ 1300nm	dB/km	1,0
BANDWIDTH @ 850nm	MHz * km	\geq 200
BANDWIDTH @ 1300nm	MHz * km	\geq 600
LINK LENGTH 1000BaseSX	m	2 - 200
LINK LENGTH 1000BaseLX	m	2 - 600
LINK LENGTH 10GBase SR	m	2 - 33
LINK LENGTH 10GBase X4	m	2 - 300
FOR ENTIRE FIBER SPECS REFER TO		LL-F-005-62

— On request, fibers featuring other than the above stated specifications can be quoted —

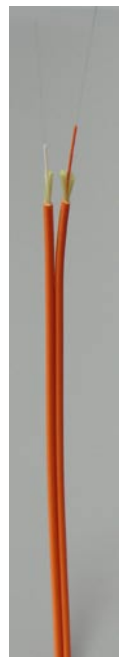

© Fumo2006. All Rights Reserved. – All values in this data sheet are nominal.
The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Fumo. The information is believed correct at the time of issue. Fumo reserves the right to amend this specification without notice. Specification is not contractually valid unless specifically authorized by Fumo.

Rev. 09/2008



Made in
Italy