



WEVER & DUCRÉ
LIGHTING

BOX WALL OUTDOOR 1.0

748168B3

Project

Type

Notes

Quantity

Date

GENERAL

Wall

Surface

Jet Black

IP65

Exterior

350 lm

RAL 9005 ^a

LED

2700 K

3-step binning

PHYSICAL

Length 100 mm

Width 100 mm

Height 100 mm

0.6 kg

ELECTRICAL

phase-cut dim


220 - 240 V




Total connected power 6 W

Class 1


Safety distance 0.3 m

^a Color may deviate slightly due to production conditions.

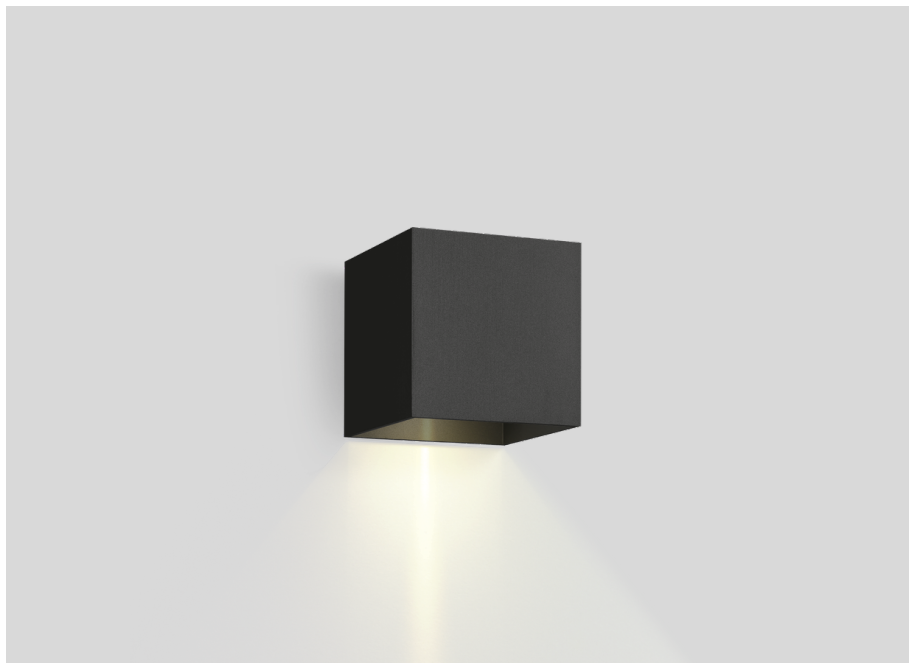

IP65   

Squared wall surface mounted luminaire made from aluminium; surface Jet Black; powder coated; matt texture; RAL 9005; direct light distribution; PCB 3-step binning; phase-cut dim; light colour 2700 K; binning initial MacAdam 3 SDCM; CRI 90; 220 - 240 V; degree of protection IP65; PC1; inclusive flaps for adjustable beam angle; light source replaceable by an authorized professional;





WEVER & DUCRÉ
LIGHTING

BOX WALL OUTDOOR 1.0

748168B3

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.95	0.92	0.89	0.86
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.