



WEVER & DUCRÉ
LIGHTING

STREX MODULE 1.0 DOT

171345B3

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling

Track

Jet Black

IP20

Interior

660 lm

RAL 9005 ^a

LED

2700 K

3-step binning

OPTICAL

Opal

PHYSICAL

Length 301 mm

Width 16 mm

Height 18 mm

0.11 kg

301 (adapter)mm

48V System

ELECTRICAL

DALI dim



48 V

LED Inset 9 W

Class 3

Safety distance 0.3 m

^a Color may deviate slightly due to production conditions.

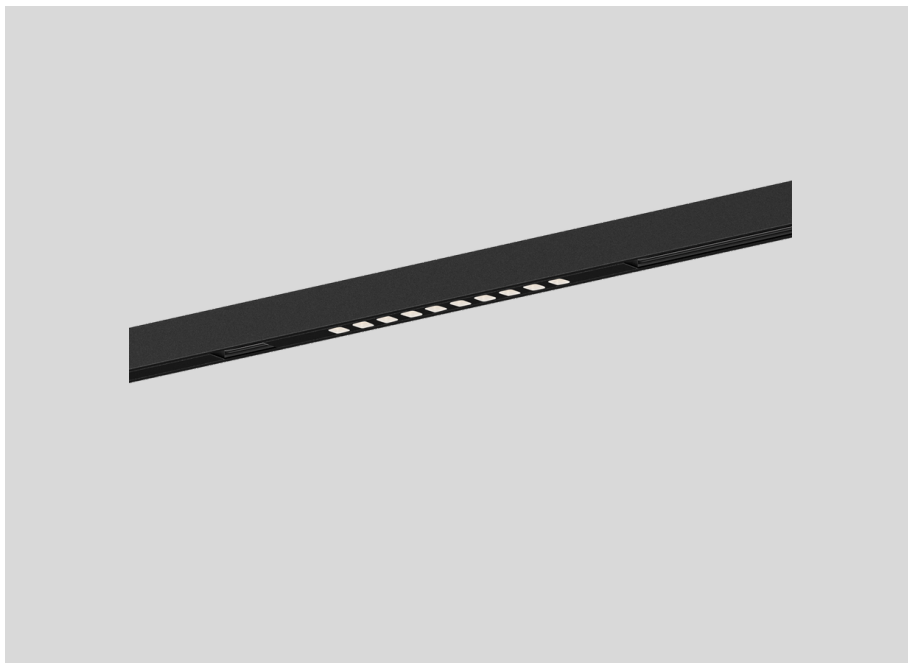

Linear light inset for 48V tracks; dot light emission; surface Jet Black; powder coated; matt texture; RAL 9005; PCB 3-step binning; DALI dim; light colour 2700 K; binning initial MacAdam 3 SDCM; CRI 90; 48 V; degree of protection IP20; PC3; light source replaceable by an authorized professional;





WEVER & DUCRÉ
LIGHTING

STREX MODULE 1.0 DOT

171345B3

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.95	0.91	0.87	0.83	0.8
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

ELECTRICAL

Dimmer

TYPE	L · W · H (MM)	ORDERCODE
DALI dimmer for switch	48-49-22	9 0 0 1 9 1 9 4

Track Profile 2m

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system custom cut suspended indirect light	Black	1000-1999-26-29	9 0 0 1 4 0 B 5 C C
STREX system custom cut suspended indirect light	White	1000-1999-26-29	9 0 0 1 4 0 W 5 C C
STREX system custom cut surface/suspended	White	1001-1999-26-29	9 0 0 1 4 1 8 3 C C
STREX system custom cut surface/suspended	Black	1001-1999-26-29	9 0 0 1 4 1 8 4 C C
STREX system custom cut recessed	White	1001-1999-37-33	9 0 0 1 4 1 8 9 C C
STREX system custom cut recessed	Black	1001-1999-37-33	9 0 0 1 4 1 9 0 C C
STREX system suspended indirect light	Black	2000-26-29	9 0 0 1 4 0 B 5
STREX system suspended indirect light	White	2000-26-29	9 0 0 1 4 0 W 5
STREX system surface/suspended	White	2000-26-29	9 0 0 1 4 1 8 3
STREX system surface/suspended	Black	2000-26-29	9 0 0 1 4 1 8 4
STREX system recessed	White	2000-37-33	9 0 0 1 4 1 8 9
STREX system recessed	Black	2000-37-33	9 0 0 1 4 1 9 0

Track Profile 1m

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system custom cut surface/suspended	White	200-999-26-29	9 0 0 1 4 1 8 1 C C
STREX system custom cut surface/suspended	Black	200-999-26-29	9 0 0 1 4 1 8 2 C C
STREX system custom cut recessed	White	200-999-37-33	9 0 0 1 4 1 8 7 C C
STREX system custom cut recessed	Black	200-999-37-33	9 0 0 1 4 1 8 8 C C
STREX system surface/suspended	White	1000-26-29	9 0 0 1 4 1 8 1
STREX system surface/suspended	Black	1000-26-29	9 0 0 1 4 1 8 2
STREX system recessed	White	1000-37-33	9 0 0 1 4 1 8 7
STREX system recessed	Black	1000-37-33	9 0 0 1 4 1 8 8



WEVER & DUCRÉ
LIGHTING

STREX MODULE 1.0 DOT

171345B3

Track Profile 3m

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system custom cut surface/suspended	White	2001-2999-26-29	9 0 0 1 4 1 8 5 C C
STREX system custom cut surface/suspended	Black	2001-2999-26-29	9 0 0 1 4 1 8 6 C C
STREX system custom cut recessed	White	2001-2999-37-33	9 0 0 1 4 1 9 1 C C
STREX system custom cut recessed	Black	2001-2999-37-33	9 0 0 1 4 1 9 2 C C
STREX system custom cut suspended indirect light	Black	2001-2999-26-29	9 0 0 1 4 1 B 5 C C
STREX system custom cut suspended indirect light	White	2001-2999-26-29	9 0 0 1 4 1 W 5 C C
STREX system surface/suspended	White	3000-26-29	9 0 0 1 4 1 8 5
STREX system surface/suspended	Black	3000-26-29	9 0 0 1 4 1 8 6
STREX system recessed	White	3000-37-33	9 0 0 1 4 1 9 1
STREX system recessed	Black	3000-37-33	9 0 0 1 4 1 9 2
STREX system suspended indirect light	Black	3000-26-29	9 0 0 1 4 1 B 5
STREX system suspended indirect light	White	3000-26-29	9 0 0 1 4 1 W 5

In Track Driver 100W

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system surface	Black	438-16-18	9 0 0 1 4 1 4 3
STREX system surface	White	438-16-18	9 0 0 1 4 1 4 4
STREX system suspended	White	3000	9 0 0 1 4 1 5 7
STREX system suspended	Black	3000	9 0 0 1 4 1 7 4
STREX system surface	Black	468-26-29	9 0 0 1 4 1 7 6
STREX system surface	White	468-26-29	9 0 0 1 4 1 7 8

In Track Driver 250W

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system surface	Black	408-16-18	9 0 0 1 4 1 4 5
STREX system surface	White	408-16-18	9 0 0 1 4 1 4 6
STREX system suspended	White	3000	9 0 0 1 4 1 5 8
STREX system suspended	Black	3000	9 0 0 1 4 1 7 5
STREX system surface	Black	438-26-29	9 0 0 1 4 1 7 7
STREX system surface	White	438-26-29	9 0 0 1 4 1 7 9

End Cap

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system surface/suspended	White	26-2.5-29	9 0 0 1 4 1 4 7
STREX system surface/suspended	Black	26-2.5-29	9 0 0 1 4 1 4 8
STREX system recessed	White	37-10-27	9 0 0 1 4 1 4 9
STREX system recessed	Black	37-10-27	9 0 0 1 4 1 5 0

Power Feed

TYPE	COLOUR	L · H (MM)	ORDERCODE
STREX system	White	112-18	9 0 0 1 4 1 5 3
STREX system	Black	112-18	9 0 0 1 4 1 5 4

Wireless Casambi Control

TYPE	COLOUR	L · H (MM)	ORDERCODE
STREX system	White	143-58	9 0 0 1 4 1 5 5
STREX system	Black	143-58	9 0 0 1 4 1 5 6

[171345B3suc'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com

June 24, 2022



WEVER & DUCRÉ
LIGHTING

STREX MODULE 1.0 DOT

171345B3

Suspension Set

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system 1.5m suspended	Stainless Steel	80·23·1500	9 0 0 1 4 1 6 0
STREX system 3.0m suspended	Stainless Steel	80·23·3000	9 0 0 1 4 1 6 1
STREX system 1.5m suspended	Black	80·23·1500	9 0 0 1 4 2 7 4
STREX system 3.0m suspended	Black	80·23·3000	9 0 0 1 4 2 7 5

Power Supply 100W

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system surface	White	439·26·44	9 0 0 1 4 1 6 6
STREX system surface	Black	439·26·44	9 0 0 1 4 1 6 7
STREX system suspended	White	439·26·44	9 0 0 1 4 1 6 8
STREX system suspended	Black	439·26·44	9 0 0 1 4 1 6 9
STREX system suspended	White	439·26·44	9 0 0 1 4 2 6 0
STREX system suspended	Black	439·26·44	9 0 0 1 4 2 6 1

Power Supply 150W

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system surface	White	439·26·44	9 0 0 1 4 1 7 0
STREX system surface	Black	439·26·44	9 0 0 1 4 1 7 1
STREX system suspended	White	439·26·44	9 0 0 1 4 1 7 2
STREX system suspended	Black	439·26·44	9 0 0 1 4 1 7 3
STREX system suspended	White	439·26·44	9 0 0 1 4 2 6 2
STREX system suspended	Black	439·26·44	9 0 0 1 4 2 6 3

Mounting Bracket

TYPE	ORDERCODE
STREX system recessed	9 0 0 1 4 1 9 3

Connector

TYPE	COLOUR	L · H (MM)	ORDERCODE
STREX system	White	105·18	9 0 0 1 4 1 9 6
STREX system	Black	105·18	9 0 0 1 4 1 9 7

L-Connector

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system surface/suspended	White	105·105·18	9 0 0 1 4 1 9 8
STREX system surface/suspended	Black	105·105·18	9 0 0 1 4 1 9 9
STREX system recessed	White	105·105·18	9 0 0 1 4 2 5 1
STREX system recessed	Black	105·105·18	9 0 0 1 4 2 5 2

L-Connector non-electrical

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system recessed	White	105·105·18	9 0 0 1 4 2 5 6
STREX system recessed	Black	105·105·18	9 0 0 1 4 2 5 7
STREX system surface	White	105·105·18	9 0 0 1 4 2 5 8
STREX system surface	Black	105·105·18	9 0 0 1 4 2 5 9



WEVER & DUCRÉ
LIGHTING

STREX MODULE 1.0 DOT

171345B3

DALI Selv Device

TYPE	L · W · H (MM)	ORDERCODE
STREX system	213·37·25	9 0 0 1 9 1 9 3



Driver

TYPE	L · W · H (MM)	ORDERCODE
STREX system 100W	350·30·18	9 0 2 1 8 9 0 1
STREX system 150W	350·30·18	9 0 2 1 8 9 0 2
STREX system 250W	400·40·22	9 0 2 1 8 9 0 3

Blank Cover 1m

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system	Black	1000·18·3	9 1 1 0 0 1 B 0
STREX system	White	1000·18·3	9 1 1 0 0 1 W 0

Blank Cover 2m

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system	Black	2000·18·3	9 1 1 0 0 2 B 0
STREX system	White	2000·18·3	9 1 1 0 0 2 W 0

Blank Cover 3m

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
STREX system	Black	3000·18·3	9 1 1 0 0 3 B 0
STREX system	White	3000·18·3	9 1 1 0 0 3 W 0