

1. Three phase autotransformers for voltage changing

AUT FAMILY > AUTW12.5



Features

Dry type autotransformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan

Metalic box IP-23 enclosure painted with epoxy polyester resin RAL 7035 (cat. C2 ISO 12994-2)


Safety class I

Includes stainless steel lifting eyebolts from 25 kVA

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	12,5 kVA
Input voltage	400 V
Output voltage	230 V
Frequency	50/60 Hz
Connection group	YN0
Protection degree	IP-23
Cooling	ANAN
Ambient temperature	30°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Leakage current	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Weight	44,8 Kg
Dimensions	384x260x383x245x250 mm6Ø

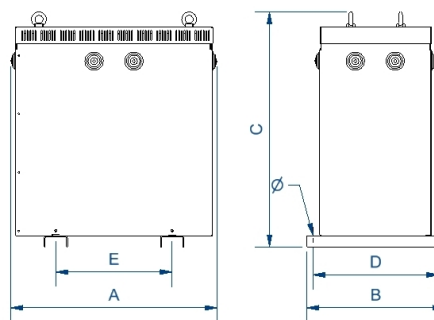

+ Info www.polylux.com

Productos equivalentes