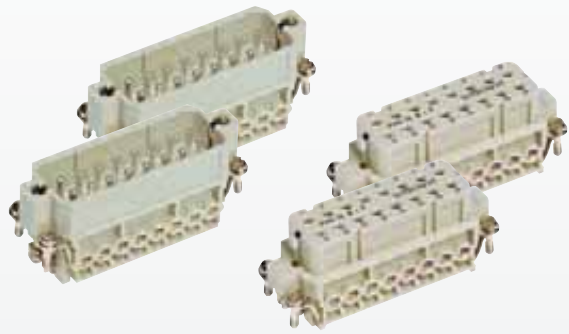




Number of contacts

32 +


Inserts

Identification		Series	Part No.		Drawing	Dimensions in mm
Screw terminal		Han A® 1–16 17–32	09 20 016 2612 09 20 016 2613	09 20 016 2812 09 20 016 2813	Dimensions for inserts see page 01.16	
						
Crimp terminal Order crimp contacts separately		Han A® 1–16 17–32	09 20 016 3001 09 20 016 3011	09 20 016 3101 09 20 016 3111	Contact arrangement View from termination side	
						
						
					Panel cut out for inserts for use without hoods/housings	
						

Wire gauge		Part No.		Drawing	Dimensions in mm																																
Identification	(mm²)	Male contacts	Female contacts																																		
Crimp contacts Power contacts				Operating contact Identification																																	
silver plated	0.5	09 33 000 6121	09 33 000 6220																																		
	0.75	09 33 000 6114	09 33 000 6214																																		
	1.0	09 33 000 6105	09 33 000 6205																																		
	1.5	09 33 000 6104	09 33 000 6204																																		
	2.5	09 33 000 6102	09 33 000 6202																																		
	3	09 33 000 6106	09 33 000 6206																																		
	4	09 33 000 6107	09 33 000 6207																																		
gold plated	0.5	09 33 000 6122	09 33 000 6222	Crimp contact identification																																	
	0.75	09 33 000 6115	09 33 000 6215	<table><tr><th>Identification</th><th colspan="2">Wire gauge</th><th>Stripping length</th></tr><tr><td>no groove</td><td>0.5 mm²</td><td>AWG 20</td><td>7.5 mm</td></tr><tr><td>1 groove*</td><td>0.75 mm²</td><td>AWG 18</td><td>7.5 mm</td></tr><tr><td>1 groove</td><td>1 mm²</td><td>AWG 18</td><td>7.5 mm</td></tr><tr><td>2 grooves</td><td>1.5 mm²</td><td>AWG 16</td><td>7.5 mm</td></tr><tr><td>3 grooves</td><td>2.5 mm²</td><td>AWG 14</td><td>7.5 mm</td></tr><tr><td>wide groove</td><td>3.0 mm²</td><td>AWG 12</td><td>7.5 mm</td></tr><tr><td>no groove</td><td>4 mm²</td><td>AWG 12</td><td>7.5 mm</td></tr></table>		Identification	Wire gauge		Stripping length	no groove	0.5 mm²	AWG 20	7.5 mm	1 groove*	0.75 mm²	AWG 18	7.5 mm	1 groove	1 mm²	AWG 18	7.5 mm	2 grooves	1.5 mm²	AWG 16	7.5 mm	3 grooves	2.5 mm²	AWG 14	7.5 mm	wide groove	3.0 mm²	AWG 12	7.5 mm	no groove	4 mm²	AWG 12	7.5 mm
	Identification	Wire gauge				Stripping length																															
	no groove	0.5 mm²	AWG 20			7.5 mm																															
	1 groove*	0.75 mm²	AWG 18			7.5 mm																															
	1 groove	1 mm²	AWG 18			7.5 mm																															
	2 grooves	1.5 mm²	AWG 16			7.5 mm																															
3 grooves	2.5 mm²	AWG 14	7.5 mm																																		
wide groove	3.0 mm²	AWG 12	7.5 mm																																		
no groove	4 mm²	AWG 12	7.5 mm																																		
1.0	09 33 000 6118	09 33 000 6218																																			
1.5	09 33 000 6116	09 33 000 6216																																			
2.5	09 33 000 6123	09 33 000 6223																																			
4.0	09 33 000 6119	09 33 000 6221																																			

* on the back crimp collar

* on the back crimp collar

Stock items in bold type