BEGA 71 068

Connecting Pillar IP 44

Project · Reference number

Date

Product data sheet


Application

Permanent connecting pillar for electrical connection of portable garden luminaires or electrically operated gardening tools. Only BEGA installation accessories and plugs according to DIN 49441/49406 with safety collar guarantee the specified degree of protection.

Product description

Connecting pillar made of aluminium alloy, aluminium and stainless steel Support and cover GRP · Colour graphite Connecting pillar with mounting base made of hot-dip galvanised steel according to EN ISO 1461 for bolting onto a foundation provided by the customer or on other paved surfaces such as terraces and paving stones. Base plate with 3 fixing holes ø 5.5 mm · Pitch 120° · Pitch circle ø 60 mm 2 Safety socket outlets 16 A \cdot 250 V \sim Belgian/French standard, Plug type C/E Line connector for mains supply cable up to Ø 13 mm \cdot max. 3 \times 2,5° Safety class I Protection class IP 44 Protected against granular foreign bodies > 1 mm and splash water (with closed flap) C ∈ – Conformity mark Weight: 1.8 kg



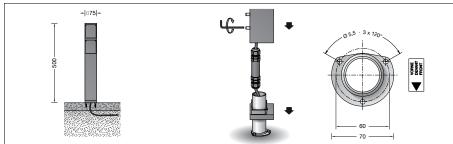

Accessories

Distribution box for installation in soil

70 730 Distribution box with 7 cable entries

Connection terminals $5 \times 4^{-}$

71 053 Distribution box with 10 cable entries Connection terminals 6 x 16⁻¹

A separate instructions for use can be provided upon request.