

**SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE**

24V LED+Z-Diode PG9

Form A (18 mm)

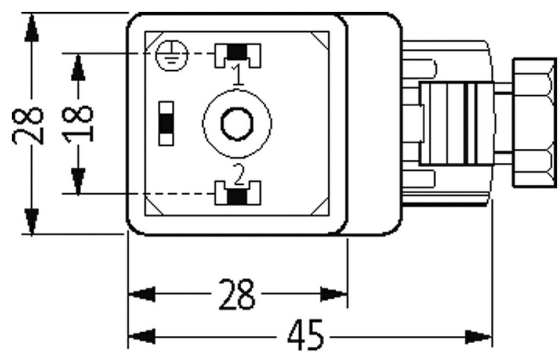
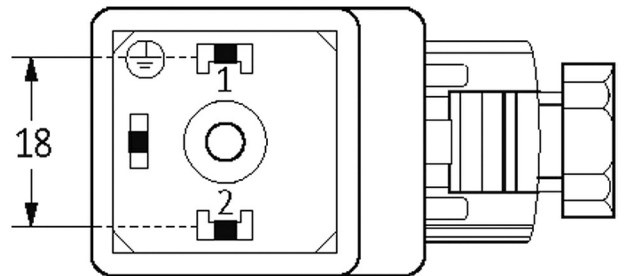
LED and Z-diode

24 V AC  $\pm 20\%$  / DC  $\pm 25\%$ 

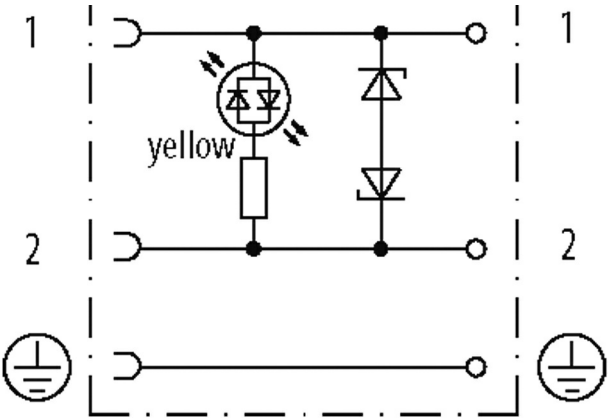
PG9

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)**Afbeelding**

Height: 41 mm



Product van afwijken van afbeelding

| Form                          |                                        |
|-------------------------------|----------------------------------------|
| Form                          | 29021                                  |
| General data                  |                                        |
| Temperature range             | -20...+60 °C                           |
| Technical Data                |                                        |
| Operating voltage             | 24 V AC $\pm 20\%$ / DC $\pm 25\%$     |
| Operating current per contact | max. 4 A                               |
| Configuration                 | 2 contacts + PE                        |
| Locking of ports              | M3 (recommended torque 0.4 Nm)         |
| Protection                    | IP65 inserted and tightened (EN 60529) |
| Commerciële gegevens          |                                        |
| Douane tarief nummer          | 85366990                               |
| EAN                           | 4048879187657                          |
| eClass                        | 27279221                               |
| Land van oorsprong            | CN                                     |
| Verpakkingseenheid            | 1                                      |