


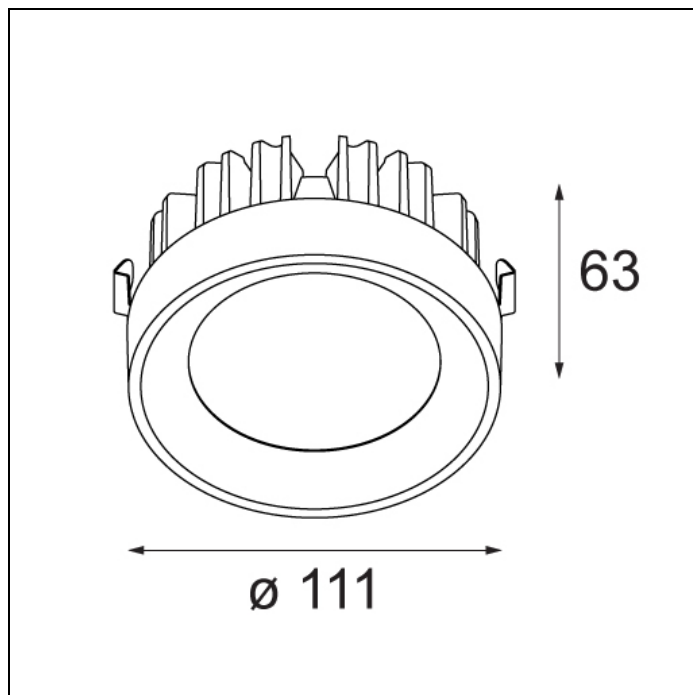

M-LED 111 GE


After introducing the M-LED 111 and M-LED 70 modules, Modular has again prepared some icons to be LED-ified. Replacing the well-known MR16 lamp, the M-LED 50 module is designed for Lotis for LED, Asy lotis for LED and Lotis square for LED. M-LED 111 is your solution for the Haloscan for LED and Multiple (trimless) for LED series, while M-LED 70 seamlessly fits your Mini multiple (trimless) for LED.

Art. Nr. 11298409

SPECIFICATIONS

Lamp	1x LED Array		
Gear / Transfo	LED gear not incl.		
Weight	0.75kg		
Min. distance	0.1 m		
IP	IP20		
Glow wire test	960°		
Lifetime	L80 B20 @ 50.000 hrs		
CRI	90		
Power supply	350mA	500mA	700mA
	31Vf	32Vf	34Vf
Connected load	11W	16.25W	23.6W
Lumen	904lm	1233lm	1596lm
Efficacy	82lm/W	76lm/W	68lm/W
UGR	16	17	18
Adjustability	Not Applicable		
Remark	! can be combined with Bolster recessed, Haloscan 179, Lotis and Multiple (trimless)		

	WARM WHITE 2700K / CRI 90+			WARM WHITE 3000K / CRI 90+			NEUTRAL WHITE 4000K / CRI 90+		
	SPOT 15°	MEDIUM 25°	FLOOD 40°	SPOT 15°	MEDIUM 25°	FLOOD 40°	SPOT 15°	MEDIUM 25°	FLOOD 40°
black matt	11298002	11298102	11298202	11298302	11298402	11298502	11298602	11298702	11298802
brushed alu	11298024	11298124	11298224	11298324	11298424	11298524	11298624	11298724	11298824
white struc	11298009	11298109	11298209	11298309	11298409	11298509	11298609	11298709	11298809



Available label
<http://supemodular.com/assets/TYPE2.pdf>



M-LED 111 GE

ACCESSORIES

HUE-BRIDGE	
70000616	HUE BRIDGE EU
70000617	HUE BRIDGE UK

HUE-DEVICE	
70000152	HUE DIMMER SWITCH
70000615	HUE TAP SWITCH
70008054	HUE SENSOR